



96

lumens/watt

Integrated Bulkhead

LED Bulkhead G1 TU D30 25W 840 S
NNN

93107558

Product information

A simple and elegant light fitting, designed with Integrated LED Light Module and dedicated optic, both for interior and exterior applications. The Integrated Bulkhead range offers a comprehensive choice of versions including two sizes, opal diffuser and optional sensor function. It is a wall and ceiling LED luminaire that can be utilised in versatile application ranges including damp environments, entrance halls, receptions, stairwells, corridors, circulation routes, rest areas and outside walls of buildings.

Product data

| | |
|---|---|
| Product code | 93107558 |
| Description | LED Bulkhead G1 TU D30 25W 840 S NNN |
| DIALux description | TUNGSRAM - Integrated Bulkhead - 2400lm - 25W - 4000K - 80CRI - 93107558[SKU] - Surface |
| Brand | TUNGSRAM |
| Product category | Integrated Bulkhead |
| Product family | Bulkheads |
| Application areas | Stairways / Corridors |
| DUN Code | 10064894579124 |
| Light source | LED |
| Sensor | No sensor |
| Emergency option | No EM |
| Mounting type | Surface |
| Weight [kg] | 1 |
| Body color | White |
| Product dimensions (Length) x (Width) x (Height) [mm] | Dia 300 x Dia 300 x 109 |
| Operating temperature min [°C] | -30 |
| Operating temperature max [°C] | 40 |
| Rated ambient temperature (tq) [°C] | 25 |
| Cooling | Passive |
| Certifications | CE |
| General warranty [year] | 5 |

Performance data

| | |
|----------------------------|-------|
| System power [W] | 25 |
| Nominal luminous flux [lm] | 2400 |
| Rated efficacy [lm/W] | 96 |
| Rated life L70/B50 [h] | 60000 |
| IP front (optical) | 65 |
| IP back (electrical) | 65 |
| IP Rating | 65 |
| Impact resistance (IK) | IK10 |

Photometrical data

| | |
|---|--------------|
| Photometric distribution | Wide |
| Nominal correlated colour temperature (CCT) [K] | 4000 |
| Colour rendering index (CRI) [Ra] | ≥ 80 |
| Nominal beam angle [°] | 125 ± 12 |
| UGR value (4H8H) | 26,4 |
| Colour consistency in MacAdam steps SDCM | ≤ 6 |


Electrical data

| | |
|---|------------|
| IEC protection class | Class II |
| Operating voltage [V] | 220-240V |
| Rated frequency or frequency range [Hz] | 50/60Hz |
| Lamp input current [mA] | 120 |
| Nominal lamp power factor | ≥ 0.9 |
| Controllability | Static |

Logistic data

| | |
|----------------|-----------|
| Box quantity | 1 |
| Shipment | Standard |
| Product status | Available |

Light distribution

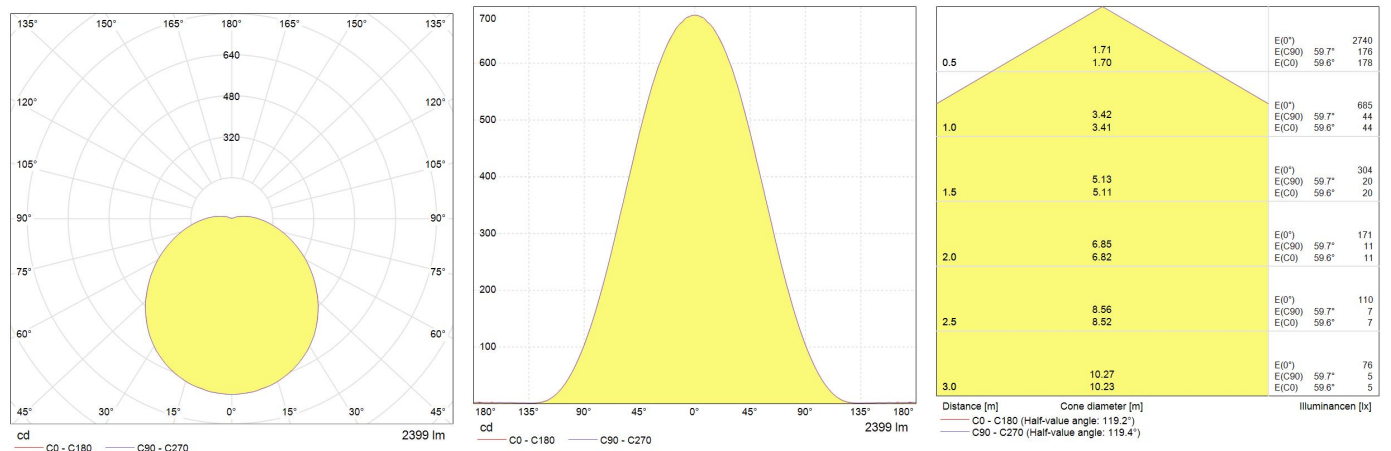

Downloads & Links

[Go to the catalog site \(HTTP\)](#)

[Datasheet \(PDF\)](#)

[Installation guide \(PDF\)](#)

[Images \(HTTP\)](#)

[Photometry files for EMERGENCY versions \(HTTP\)](#)

[DoC document \(PDF\)](#)

[Datasheet \(HUN\) \(PDF\)](#)

[Datasheet \(FR\) \(PDF\)](#)