

QUICK START GUIDE

1] PRODUCT PRESENTATION

The PBRF is made from environmentally-friendly aluminium. With its clean, simple and elegant design, the PBRF is visible in any environment and thanks to the radio frequency there is no wiring required at all.

Installation is simple thanks to its snap-on cover it connects to door automation and access control systems for perfect integration.

The high quality ergonomic switch makes accessibility easy. It is activated by a finger, hand, elbow, foot, knee, or other implement, depending on the installed height of the button.

- **Modern design in environmentally-friendly aluminium**
- **Snap-on cover for easy installation**
- **Radio frequency means no wiring required**

- **Material: aluminium / ABS**



IP56



WEEE & RoHS



CE Certification




-20°C to +60°C



IK10




UKCA Certification

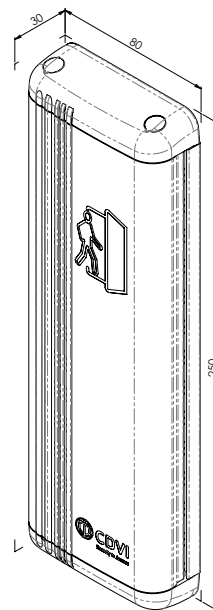


2] MOUNTING


1 - Pull the release tab in the direction of the arrows

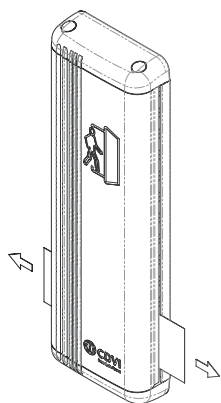

2 - Mount / screw on wall C/NO/NC connection

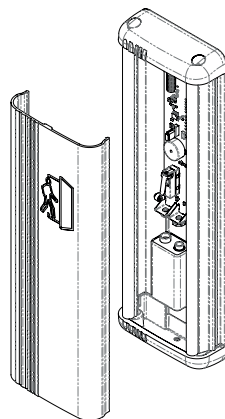

3 - Close by clipping
4 - To dismantle, unscrew the bottom cap and slide on the cover

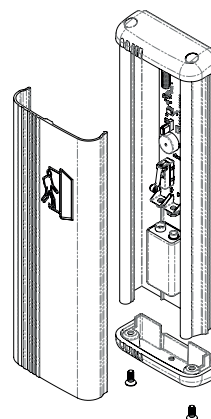

3] PROGRAMMING

All CDVI radio receivers are compatible with PBRF. However, we recommend the CUBE X receiver.

To program the PBRF with the CUBE X, please refer to the receiver installation manual.



QUICK START GUIDE

1] PRÉSENTATION PRODUIT

Le PBRF est fabriqué en aluminium respectueux de l'environnement. Avec son design clair et élégant, il est visible, esthétique, résistant et équipé de micro-rupteurs performants, éco-conçus. Son installation est simple grâce à son capot clipsable, c'est un émetteur radio compatible avec tous les récepteurs CDVI. Simplifiez-vous la vie et investissez dans la qualité et l'innovation avec notre PBRF, accessible dans tous les cas avec le doigt, la main, le coude, le pieds, le genou ou plus, selon la hauteur de l'installation.

- **Design moderne en aluminium respectueux de l'environnement**
- **Capot clipsable pour une installation aisée et rapide**
- **La radio fréquence ne nécessite aucun câblage**

■ Matière : Aluminium / ABS



IP56



WEEE & RoHS



CE Certification




-20°C à +60°C



IK10




UKCA Certification

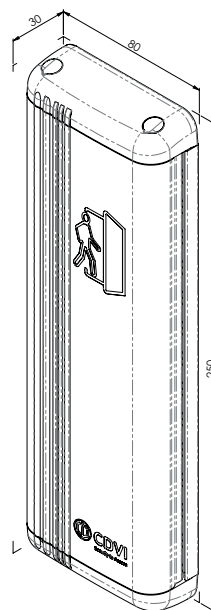


2] MONTAGE

1 - Tirer la languette de déclipsage du capot dans le sens des flèches

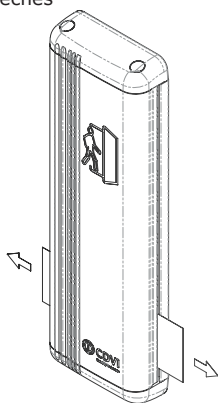


2 - Montage / vissage au mur.

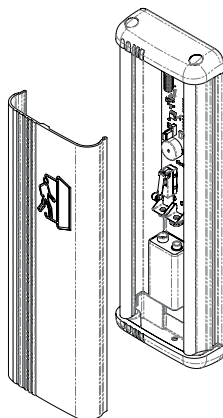

3 - Clipser le capot après fixation

4 - Pour le démontage, dévisser le bouchon du bas et faire glisser le capot

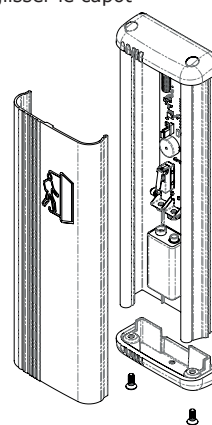

3] PROGRAMMATION

Tous les récepteurs de CDVI sont compatibles avec le PBRF. Néanmoins, nous vous recommandons le récepteur CUBE X.



Pour programmer le PBRF avec le CUBE X, merci de vous référer au manuel d'installation du récepteur.