

These dimensions will be especially checked at delivery Only inspection dimensions With /E marked dimensions are only valid for internal use					
These dimensions will be especially checked at delivery Only inspection dimensions With /E marked dimensions are only valid for internal use		These dimensions will be especially checked at delivery Only inspection dimensions With /E marked dimensions are only valid for internal use		These dimensions will be especially checked at delivery Only inspection dimensions With /E marked dimensions are only valid for internal use	
These dimensions will be especially checked at delivery Only inspection dimensions With /E marked dimensions are only valid for internal use		These dimensions will be especially checked at delivery Only inspection dimensions With /E marked dimensions are only valid for internal use	These dimensions will be especially checked at delivery Only inspection dimensions With /E marked dimensions are only valid for internal use	These dimensions will be especially checked at delivery Only inspection dimensions With /E marked dimensions are only valid for internal use	These dimensions will be especially checked at delivery Only inspection dimensions With /E marked dimensions are only valid for internal use
These dimensions will be especially checked at delivery Only inspection dimensions With /E marked dimensions are only valid for internal use		These dimensions will be especially checked at delivery Only inspection dimensions With /E marked dimensions are only valid for internal use	These dimensions will be especially checked at delivery Only inspection dimensions With /E marked dimensions are only valid for internal use	These dimensions will be especially checked at delivery Only inspection dimensions With /E marked dimensions are only valid for internal use	These dimensions will be especially checked at delivery Only inspection dimensions With /E marked dimensions are only valid for internal use
These dimensions will be especially checked at delivery Only inspection dimensions With /E marked dimensions are only valid for internal use		These dimensions will be especially checked at delivery Only inspection dimensions With /E marked dimensions are only valid for internal use	These dimensions will be especially checked at delivery Only inspection dimensions With /E marked dimensions are only valid for internal use	These dimensions will be especially checked at delivery Only inspection dimensions With /E marked dimensions are only valid for internal use	These dimensions will be especially checked at delivery Only inspection dimensions With /E marked dimensions are only valid for internal use
These dimensions will be especially checked at delivery Only inspection dimensions With /E marked dimensions are only valid for internal use		These dimensions will be especially checked at delivery Only inspection dimensions With /E marked dimensions are only valid for internal use	These dimensions will be especially checked at delivery Only inspection dimensions With /E marked dimensions are only valid for internal use	These dimensions will be especially checked at delivery Only inspection dimensions With /E marked dimensions are only valid for internal use	These dimensions will be especially checked at delivery Only inspection dimensions With /E marked dimensions are only valid for internal use

Teile - Nr./ Typ
part no./ type

Kodierung
coding

Erläuterung der Kodierung/
exposition the coding:
Positionierung (P) / positioning
Kodierung (K) / coding
Verrastung zwischen Kammer (V) /
to lock in place

15.430.1257.2
8105FU/ 2C10 VLA RW GW

C 10

12

P = 1b, 2a
K = d20
V = 1+2

15.431.0257.2
8105FU/ 2C 1 VLA RW GW

C 1

12

P = 1b, 2a
K = 01c, d20
V = 1+2

15.431.1257.2
8105FU/ 2C11 VLA RW GW

C 11

12

P = 1a, 2a
K = d20
V = 1+2

15.432.1257.2
8105FU/ 2C12 VLA RW GW

C 12

12

P = 1a, 1b
K = d20
V = 1+2

15.433.1257.2
8105FU/ 2C13 VLA RW GW

C 13

12

P = 1a
K =
V = 1+2

15.435.0257.2
8105FU/ 2C 5 VLA RW GW

C 5

12

P = 1a, 2b
K = d20
V = 1+2

15.438.0257.2
8105FU/ 2C 8 VLA RW GW

C 8

12

P = 2a, 2b
K = d20
V = 1+2


15.439.0257.2
8105FU/ 2C 9 VLA RW GW

C 9




12

P = 1b, 2b
K = d20
V = 1+2

Schnitt A-A
section A-A

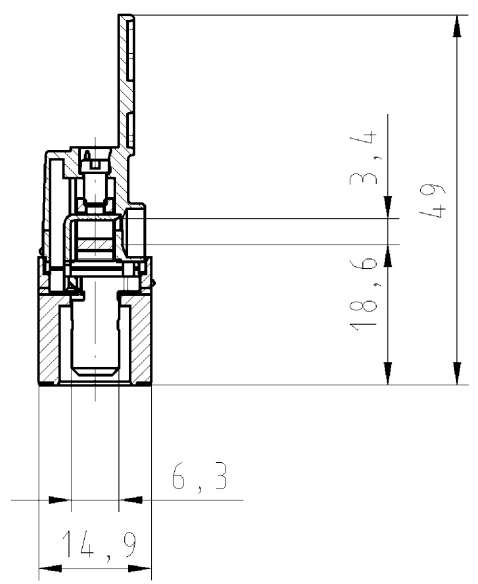

ACHTUNG! Unterscheidungsmerkmal
flamwidriges Material/
ATTENTION! differentiator
for flame resistand material

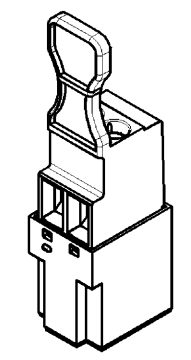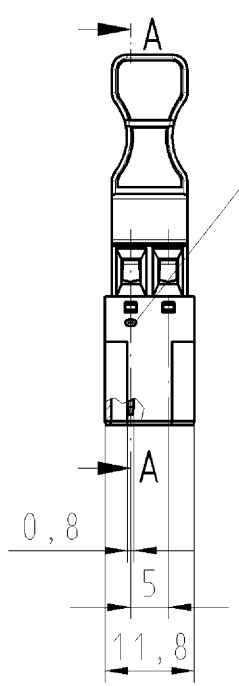

Weitere Daten siehe Katalog
further data see catalog

Weitere Farben auf Anfrage
further colours on request

Zulässige Abweichungen nach DIN 7167/Permissible deviations acc. to DIN 7167. (This DIN-standard describes the envelope principle. According to the envelope principle the deviations of form and parallelism are limited by the size tolerances).				ja/yes ☒ Stoffverbots- und Deklarationsliste nach UU-TQM-05/03 ist einzuhalten. Conformity with Wieland document UU-TQM-05/03 (list of prohibited / declarable hazardous substances) to be declared!					
Freitoleranz nach General tolerance		DIN ISO 2768 m		CAD - Zeichnung, keine manuellen Änderungen CAD - drawing, no manual modifications allowed		1.Verwendung: First Use:		Blatt: 1 von 1 Sheet: of 1	
		/		Werkstoff/Material		2010 Tag/Date		Name	
		/				gezeichnet drawn		22.10. Treschan	
		/ Maßstab/Scale				geprüft checked			
		/ 1:1				Normgepr. Stand. check			
		/ Vol.		mm³ Ofl./Surf.		mm³		Ersatz für/Replacement for: -	
		/				Type		Benennung/Title	
		/				8105FU/ 2 C.. VLA RW GW		pluggable PCB terminal LP_STECKVERBINDER	
		Index		Datum / Blatt Date / Sheet				2-polig/ 2poles, vertikale Ausführung/ vertical version, Verriegelung innen/ locking inside, mit Ausziehhilfe/ with taking off assistance	
		Änderung/Revision							

Weitergabe sowie Vervielfältigung dieses Dokuments, Verwertung und Mitteilung seines Inhalts sind verboten, soweit nicht ausdrücklich gestattet.
The reproduction, distribution and utilization of this document as well as the communication of its contents to others without express authorization is prohibited.