

These dimensions will be especially checked at delivery

Only inspection dimensions


With /E marked dimensions are only valid for internal use

braun/brown

schwarz/black




schwarz/black

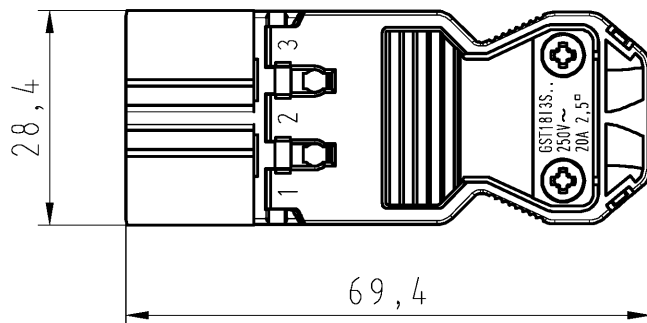

für Kabel- ϕ 6,5 - 10,5
for cable- ϕ 6.5 - 10.5

Anwendung: Schaltanwendung
application: switching application

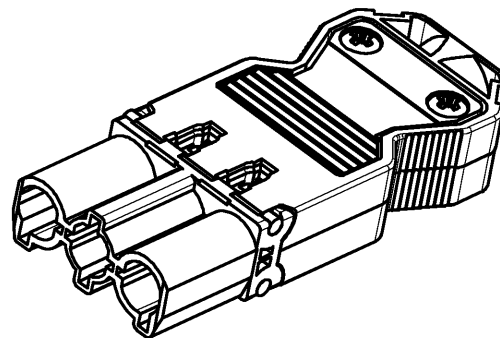

Tolerierung Size ISO 14405(E)/Tolerance system Size ISO 14405(E).
(This ISO-standard describes the envelope principle. According to the envelope principle the deviations of form and parallelism are limited by the size tolerances).

ja/yes ☒ Stoffverbots- und Deklarationsliste nach WN 5020.010 ist einzuhalten.
Conformity with Wieland document WN 5020.010 e (list of prohibited /
deklarable hazardous substances) to be declared!

Freitoleranz nach
General tolerance

CAD - Zeichnung, keine manuellen Änderungen
CAD - drawing, no manual modifications allowed

1.Verwendung:
First Use:

Blatt: 1 von 1
Sheet: of

	/		Werkstoff/Material	2015	Tag/Date	Name	Zeichnung Nr./Drawing No.	Index
	/			gezeichnet drawn	18.05.	Treschan	92.732.3853.0 01K	
	/	Maßstab/Scale		geprüft checked	-	-		
	/	1:1		Normgepr. Stand. check	-	-		
	/	Vol.	mm ³ Ofl./Surf.	mm ²	Ersatz für/Replacement for: -			
	/			Type	Benennung/Title			
	/			GST1813S	STECKERT MIT ZUGENTLASTUNG			
Index	Datum / Blatt Date / Sheet			S1 ZR1 M BR05	Schraubanschluss, 250V AC 20A 2,5qmm; montiert male connector with strain relief, screw connection			
Änderung/Revision								