

Fiche produit

Article n° 99.432.9995.0

assemblage de câbles GST18I3KSBS 15H 20BR05

Article n°	99.432.9995.0
EAN	4049088259258
Unité de commande	30 Piece(s)

certificats/approbations

Données techniques

Remarque

Remarque	core colors with pole assignment: black (1), blue(2), brown (3)
----------	---

général

Courant nominal	16 A
Tension nominale	250 V
Tension nominale d'impulsion	4 kV
Degré de pollution	2
Détrompeur mécanique	Code 4
emboîtable	auto-bloquant (déverrouillable par outil)
Couleur de codage / contact support	marron
Marquage des pôles	1, 2, 3
Couleur du boîtier incluant la charge de traction	noir

Model

Section nominale du conducteur	1,5 mm²
Degré de protection (IP)	IP20
Type de câble	H05Z1Z1-F
couleur du câble	noir
Diamètre du câble max.	7,9 mm
Version de câble	Femelle - mâle
Type de cordon	Câble de connexion
Extrémité du câble Version 1	prise GST18I3
Extrémité du câble version 2	fiche GST18I3

matériel

Finition de surface	Etamé
Sans halogène	Oui
température continue du câble	70 °C
Isolation des composants à température continue	100 °C
résistance au feu	0,771 kWh
KNX module de base FanCoil	Eca

Dimensions


longueur totale	2 m
-----------------	-----

Dessin technique

These dimensions shall be reported, instead of all items, if they are not specified in the drawing.

These dimensions shall be reported, instead of all items, if they are not specified in the drawing.

These dimensions shall be reported, instead of all items, if they are not specified in the drawing.

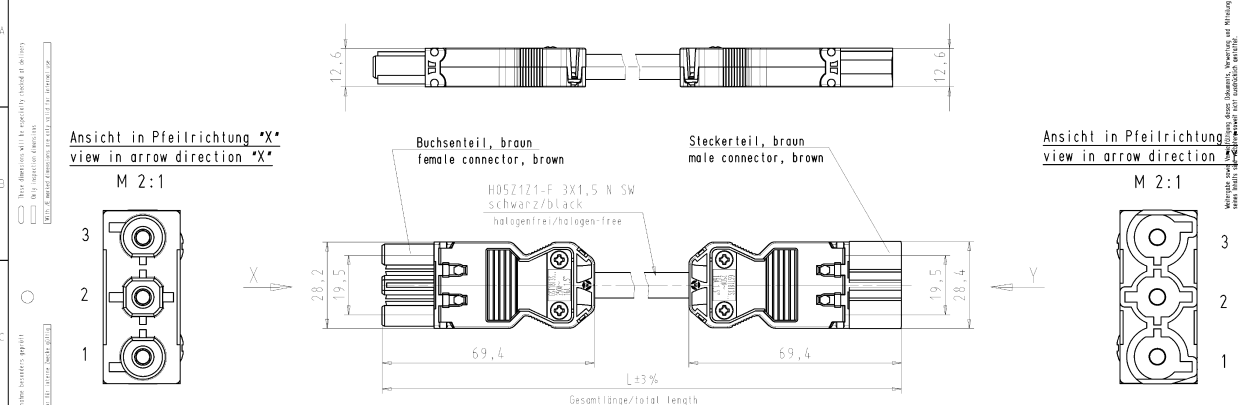

**Ansicht in Pfeilrichtung *X*
view in arrow direction *X***

M 2:1

**Ansicht in Pfeilrichtung *Y*
view in arrow direction *Y***

M 2:1

Buchsesteil, braun
female connector, brown

Steckersteil, braun
male connector, brown

H05Z1Z1-F 3X1.5 N SW
schwarz/black
halogenfrei/halogen-free

Gesamtlänge/total length

These dimensions shall be reported, instead of all items, if they are not specified in the drawing.

These dimensions shall be reported, instead of all items, if they are not specified in the drawing.

These dimensions shall be reported, instead of all items, if they are not specified in the drawing.

Teile-Nr. part-no.	L	Typ type
99.431.9995.0	1000	GST1813KSBS 15H 10BR05
99.432.9995.0	2000	GST1813KSBS 15H 20BR05
99.433.9995.0	3000	GST1813KSBS 15H 30BR05
99.434.9995.0	4000	GST1813KSBS 15H 40BR05
99.435.9995.0	5000	GST1813KSBS 15H 50BR05
99.436.9995.0	6000	GST1813KSBS 15H 60BR05
99.437.9995.0	7000	GST1813KSBS 15H 70BR05
99.438.9995.0	8000	GST1813KSBS 15H 80BR05

Weitere Daten siehe Katalog
further data see catalog

Referencing Size ISO 14068 / Reference system Size ISO 14068 (This ISO-standard describes the envelope principle. According to the envelope principle the deviations of form and position are limited by the size tolerances).		(Notes) <input type="checkbox"/> Standard of Data not available in the list of prohibited / declared hazardous substances to be designed.	
Präzisionsgrad nach General tolerance	(ISO) - Zeichnung, keine manuelle Änderungen (ISO) - Drawing, no manual modifications allowed	T. Verwendung First size	Blatt: 1 von 1 Sheet: 1 of 1
Werkstoff/Material	2014, Kupferblech Aluminium 7075, Blech 1,0 Messing Nickel Stahl	Zeichnung Nr./Drawing No. 99.431.9995.0 01K	
Maßstab Scale	Maß in mm/Dimensions are in mm		
Hersteller/Manufacturer	www.wieland-electric.com		
Typ Designation/Title	GST1813 KSBS 15H ..BR05		
Änderung/Revision	KONFEKT_LEITUNG Buchse-Stecker Schraubausführung/screw connection 250V AC 16A 1,5qmm		