

Fiche produit

Article n° 04.405.1256.0

Etiquettes de marquage pour les blocs de jonction de
rail DIN WMP SI2KTB5210CW

Article n°	04.405.1256.0
EAN	4049088379543
Unité de commande	12 Piece(s)

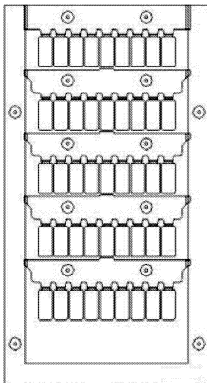
certificats/approbations

Données techniques

général

Couleur	blanc
Longueur	10 mm
Impression	Aucun
Espacement modulaire	5 mm
Impression	Aucun
Direction de codage	Horizontale et verticale
Rastermaß	5 mm
Couleur	blanc
Longueur	10 mm

Dessin technique

1	2	3	4	5	6																																								
These dimensions are for assembly, checked at delivery only, respecting dimensions with IT 18 tolerance dimensions are only valid for internal use 0 <table border="1"> <thead> <tr> <th>Teilenummer / part no.</th> <th>Typ / type</th> <th>Rastermaß L (mm) / pitch L (mm)</th> <th>Farbe / Color</th> <th>Abmessungen L x H (mm) / Dimensions L x H (mm)</th> <th>Schilder pro Platte / Tags per plate</th> <th>Platten pro Packung / Plates per pack</th> <th>Schilder pro Packung / Tags per pack</th> </tr> </thead> <tbody> <tr> <td>04.405.1056.0</td> <td>WMP SI2KTBS010LWK</td> <td>5</td> <td>white</td> <td>10 x 5</td> <td>45</td> <td>12</td> <td>540</td> </tr> <tr> <td>04.405.1156.0</td> <td>WMP SI2KTBS209EW</td> <td>5,2</td> <td>white</td> <td>9 x 5</td> <td>45</td> <td>12</td> <td>540</td> </tr> <tr> <td>04.405.1256.0</td> <td>WMP SI2KTBS210CW</td> <td>5,2</td> <td>white</td> <td>10 x 5</td> <td>45</td> <td>12</td> <td>540</td> </tr> <tr> <td>04.406.0156.0</td> <td>WMP SI2KTBS6010DW</td> <td>6</td> <td>white</td> <td>10 x 5</td> <td>45</td> <td>12</td> <td>540</td> </tr> </tbody> </table>						Teilenummer / part no.	Typ / type	Rastermaß L (mm) / pitch L (mm)	Farbe / Color	Abmessungen L x H (mm) / Dimensions L x H (mm)	Schilder pro Platte / Tags per plate	Platten pro Packung / Plates per pack	Schilder pro Packung / Tags per pack	04.405.1056.0	WMP SI2KTBS010LWK	5	white	10 x 5	45	12	540	04.405.1156.0	WMP SI2KTBS209EW	5,2	white	9 x 5	45	12	540	04.405.1256.0	WMP SI2KTBS210CW	5,2	white	10 x 5	45	12	540	04.406.0156.0	WMP SI2KTBS6010DW	6	white	10 x 5	45	12	540
Teilenummer / part no.	Typ / type	Rastermaß L (mm) / pitch L (mm)	Farbe / Color	Abmessungen L x H (mm) / Dimensions L x H (mm)	Schilder pro Platte / Tags per plate	Platten pro Packung / Plates per pack	Schilder pro Packung / Tags per pack																																						
04.405.1056.0	WMP SI2KTBS010LWK	5	white	10 x 5	45	12	540																																						
04.405.1156.0	WMP SI2KTBS209EW	5,2	white	9 x 5	45	12	540																																						
04.405.1256.0	WMP SI2KTBS210CW	5,2	white	10 x 5	45	12	540																																						
04.406.0156.0	WMP SI2KTBS6010DW	6	white	10 x 5	45	12	540																																						
These dimensions are for assembly, checked at delivery only, respecting dimensions with IT 18 tolerance dimensions are only valid for internal use 0 																																													
These dimensions are for assembly, checked at delivery only, respecting dimensions with IT 18 tolerance dimensions are only valid for internal use 0 <table border="1"> <thead> <tr> <th colspan="2">Technical Specifications</th> </tr> </thead> <tbody> <tr> <td>Material</td> <td>PC</td> </tr> <tr> <td>Flammability</td> <td>UL - 94 Class V0</td> </tr> <tr> <td>Temperature range</td> <td>-30 to +120 °C</td> </tr> <tr> <td>Abrasion Resistance</td> <td>CEI 16-7</td> </tr> <tr> <td>Resistance to UV</td> <td>UNI EN ISO 4892-2:2006</td> </tr> </tbody> </table>						Technical Specifications		Material	PC	Flammability	UL - 94 Class V0	Temperature range	-30 to +120 °C	Abrasion Resistance	CEI 16-7	Resistance to UV	UNI EN ISO 4892-2:2006																												
Technical Specifications																																													
Material	PC																																												
Flammability	UL - 94 Class V0																																												
Temperature range	-30 to +120 °C																																												
Abrasion Resistance	CEI 16-7																																												
Resistance to UV	UNI EN ISO 4892-2:2006																																												
These dimensions are for assembly, checked at delivery only, respecting dimensions with IT 18 tolerance dimensions are only valid for internal use 0 <table border="1"> <thead> <tr> <th colspan="2">Tolerierung Size ISO 14445 E / tolerance system Size ISO 14445 E</th> </tr> </thead> <tbody> <tr> <td>Freibleiervance nach general tolerance</td> <td> Material / material 2017 Tag/Date 27.01 ScA 1. Verwendung First use Zeichnung Nr. / drawing no. 04.405.1056.0 01K </td> </tr> <tr> <td>Vol.</td> <td>mm³</td> </tr> <tr> <td>Off./surf.</td> <td>mm²</td> </tr> <tr> <td>Index</td> <td>Datum / list date sheet</td> </tr> <tr> <td>Änderung / revision</td> <td></td> </tr> </tbody> </table>						Tolerierung Size ISO 14445 E / tolerance system Size ISO 14445 E		Freibleiervance nach general tolerance	Material / material 2017 Tag/Date 27.01 ScA 1. Verwendung First use Zeichnung Nr. / drawing no. 04.405.1056.0 01K	Vol.	mm³	Off./surf.	mm²	Index	Datum / list date sheet	Änderung / revision																													
Tolerierung Size ISO 14445 E / tolerance system Size ISO 14445 E																																													
Freibleiervance nach general tolerance	Material / material 2017 Tag/Date 27.01 ScA 1. Verwendung First use Zeichnung Nr. / drawing no. 04.405.1056.0 01K																																												
Vol.	mm³																																												
Off./surf.	mm²																																												
Index	Datum / list date sheet																																												
Änderung / revision																																													