





Technology for Light

Lampholder Water and Dustproof 27.660.U806.50

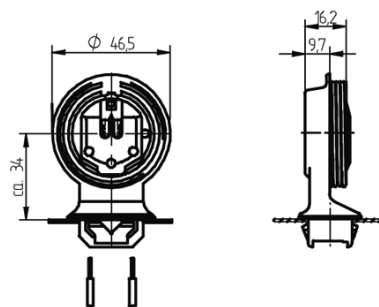

T 140



0,5 - 1,0 mm²



1,4 - 2,0

IP
65/67



Technology for Light

Lampholder Water and Dustproof

27.660.U806.50

DESCRIPTION

Max. permissible temperature at front of face plate (T):140°C

Max. permissible temperature at the rear of the lampholder (Tm): 110° C

Quick and easy wiring achieved by tapered wiring channels

Tensile interior of lampholder provides a lamp length tolerance compensation of 3 mm per pair of lampholders

Rating: 500 V (for operation with electronic ballasts)

Suitable gaskets: 27.230.-728, 27.240.-707

Product name:	Lampholder Water and Dustproof
Mounting method 1:	Snap-in foot 25.5 x 17.5 mm
Lamp center:	34
Material:	Housing: PC Rotor: PBT
T-Marking:	140
Protection class according to IEC:	IP 67
Wiring:	through snap in foot
Material thickness:	1.4 - 2.0
Gasket:	Gasket: without foot gasket
Single- / twin lampholder:	Single lampholder
Color:	white, grey
Weight:	20
Pkg.:	200