



# MASTERColour CDM-TC Elite



# MASTERC CDM-TC Elite 70W/942 G8.5 1CT

Compact, single-ended, very high-efficiency, long-life ceramic metal-halide discharge lamp producing crisp white sparkling light with high color rendering

#### **Warnings and Safety**

- · Use only in totally enclosed luminaire, even during testing (IEC61167, IEC 62035, IEC60598)
- $\boldsymbol{\cdot}$  The luminaire must be able to contain hot lamp parts if the lamp ruptures
- $\cdot$  Use only with electronic control gear
- · Control gear must include end-of-life protection (IEC61167, IEC 62035)
- A lamp breaking is extremely unlikely to have any impact on your health. If a lamp breaks, ventilate the room for 30 minutes and remove the parts, preferably with gloves. Put them in a sealed plastic bag and take it to your local waste facilities for recycling. Do not use a vacuum cleaner.

#### **Product data**

General Information					
Cap-Base	G8.5				
Operating Position	UNIVERSAL [Any or Universal (U)]				
Flux measurement reference	Sphere				
Life to 50% Failures (Nom)	15,000 hour(s)				
Light Technical					
Color Code	942 [CCT of 4200K]				
Luminous Flux	7,450 lm				
Color Designation	Cool White (CW)				
Chromaticity Coordinate X (Nom)	0.371				
Chromaticity Coordinate Y (Nom)	0.366				
Correlated Color Temperature (Nom)	4200 K				
Luminous Efficacy (rated) (Nom)	102 lm/W				

Color rendering index (CRI)	92
Arc Length O (Nom)	7.75 mm
Operating and Electrical	
Power Consumption	73.2 W
Voltage (Nom)	88 V
Controls and Dimming	
Dimmable	No
Mechanical and Housing	
Bulb Finish	Clear
Bulb Shape	T14

Datasheet, 2025, February 20 data subject to change

## **MASTERColour CDM-TC Elite**


Net Weight (Piece)	0.009 kg			
Approval and Application				
Energy Efficiency Class	F			
Mercury (Hg) Content (Max)	6.6 mg			
Mercury (Hg) Content (Nom)	6.6 mg			
Energy Consumption kWh/1000 h	74 kWh			
EPREL Registration Number	473275			
Product Data				

MASTERC CDM-TC Elite 70W/942 G8.5 1CT

Full product name	MASTERC CDM-TC Elite 70W/942 G8.5 1CT				
Full product code	871829116368800				
Order code	928193905131				
Material Nr. (12NC)	928193905131				
Numerator - Quantity Per Pack	1				
EAN/UPC - Product/Case	8718291163688				
Numerator - Packs per outer box	12				
EAN/UPC - Case	8718291163695				


## Dimensional drawing


Order product name




Product	D (max)	0	L (min)	L (max)	L	C (max)
MASTERC CDM-TC Elite	15 mm	7.75 mm	51 mm	53 mm	52 mm	85 mm
70W/942 G8.5 1CT						

#### Photometric data

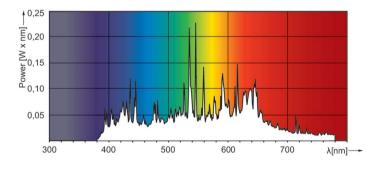






data subject to change


Spectral Power Distribution Colour - MASTERC CDM-TC Elite 70W/942 G8.5 1CT

Light Distribution Diagram - MASTERC CDM-TC Elite 70W/942 G8.5 1CT

## **MASTERColour CDM-TC Elite**

### Lifetime

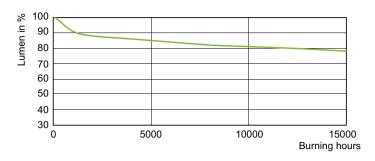

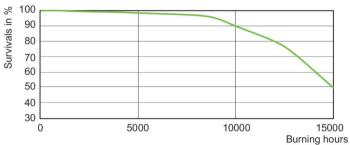

Lumen Maintenance Diagram - MASTERC CDM-TC Elite 70W/942 G8.5 1CT

LDLE\_CDMTC-E\_0007-Life expectancy diagram



© 2025 Signify Holding All rights reserved. Signify does not give any representation or warranty as to the accuracy or completeness of the information included herein and shall not be liable for any action in reliance thereon. The information presented in this document is not intended as any commercial offer and does not form part of any quotation or contract, unless otherwise agreed by Signify. Philips and the Philips Shield Emblem are registered trademarks of Koninklijke Philips N.V.