

93653 250 W 24 V

Halogen (< 75 V) with Reflector | OSRAM reflector low voltage halogen lamps provide precision optical alignment for medical and industrial fiber optic illuminators, microscopy, and surgical overhead lighting



Areas of application

- Microscopy
- Laboratory & Analysis
- UV Curing
- Fiber Illumination
- Surgical & Dental Overhead

Product features and benefits

- Precise filament alignment with patented quartz pinch technology
- OSRAM HLX lamps provide 10% higher luminous efficacy over standard halogen
- Instant on and nearly constant luminous flux over the life of the lamp
- Dimmable



Technical data

General Product Information

Global order reference	93653
Product number (Americas)	54841
Product name (Americas)	ELC-3/X 250W 24V 24/CS 1/SKU
Lamp type	MR16
ANSI code	ELC
LIF code	A1/259


Electrical Data

Nominal wattage	250 W
Nominal voltage	24.0 V
Type of current	AC

Photometric Data

Nominal luminous flux	550 lm
Color temperature	3250 K
Color rendering index Ra	100
Focal length	35.0 mm

Physical Attributes & Dimensions

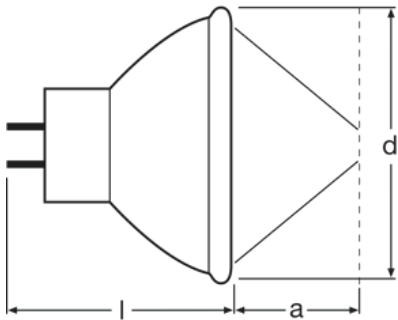

Lamp base	GX5.3
Diameter	999.9 mm
Diameter (in)	39.366 in
Diameter	999.9 mm
Length	44.8 mm
Coating	Dichroic
Product weight	27.17 g

Product datasheet

Operating Conditions

Burning position	Any
Cooling	Forced
Minimum diameter of lamp enclosure	51.0 mm

Lifetime Data

Nominal lifetime	300 hr
------------------	--------

Environmental & Regulatory Information

Information according Art. 33 of EU Regulation (EC) 1907/2006 (REACH)	
Primary article identifier	4050300636450
Declaration no. in SCIP database	No declarable substances contained
Candidate list substance 1	No declarable substances contained

Country specific information

Product code	METEL code	SEG-No.	STK-Number	UK Org
4050300636450	OSRH93653ELC3	-	-	-

Product datasheet

Safety advice

To prevent personal injury or damage to property, halogen lamps may only be operated in suitable luminaires designed with suitable mechanisms (protective shields, grids, etc.) to ensure that in the event of a lamp bursting no parts/shards can escape and that during operation no ultraviolet radiation can escape. There must also be a warning sign to indicate that the lamps give off high levels of heat. Detailed information is available on request.

Logistical Data

Product code	Product description	Packaging unit (Pieces/Unit)	Dimensions (length x width x height)	Volume	Gross weight
4050300636450	93653 250 W 24 V	Folding carton box 1	- x - x -		
4050300636467	93653 250 W 24 V	Shipping carton box 24	195 mm x 155 mm x 135 mm	4.08 dm ³	900.00 g

The mentioned product code describes the smallest quantity unit which can be ordered. One shipping unit can contain one or more single products. When placing an order, for the quantity please enter single or multiples of a shipping unit.

Disclaimer

Subject to change without notice. Errors and omission excepted. Always make sure to use the most recent release.