


ART.: 3109604

SL764+ RE OP

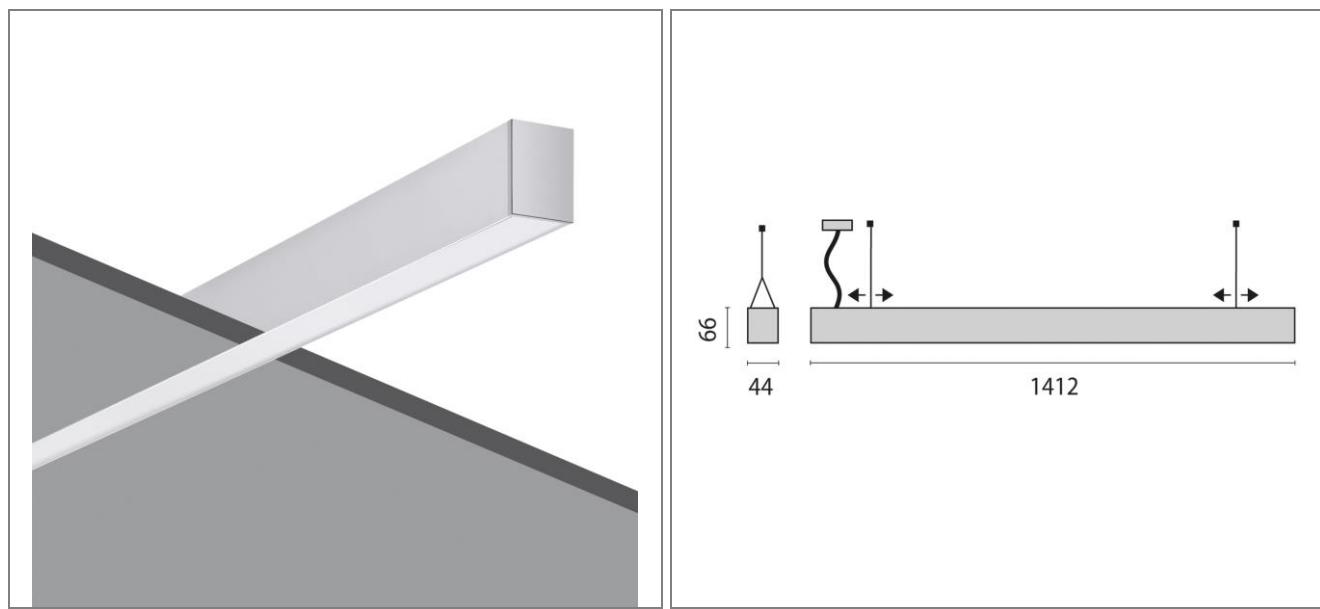

Art.: 3109604, SL764+ RE, Direct, 12W, 4000K, Driver static, Symmetrical, > 75°, Anodized, LED ceiling mount indoor luminaire, comprising: Extruded aluminium profile housing, die-cast aluminium end caps, painted. Opal PMMA diffuser for optimal light diffusion and a high light uniformity. Streamlined, simple design with flush end caps. High-quality workmanship of profile connections for a perfect look. High economic efficiency thanks to luminaire efficiencies of up to 155 lm/W. Through-wiring possible. Simple and convenient lighting installation. Interchangeable lighting inserts. Direct light distribution. Colour rendering index Ra > 80. Colour tolerance according to MacAdam ≤ 3 SDCM. Includes recessed mounting kit. Many other luminaire designs and strip light configurations are available at [www.light-performer.com](http://www.light-performer.com).

<b>Connected load</b>	12 W
<b>Luminous flux</b>	1860 lm
<b>Efficiency</b>	155 lm/W
<b>Colour temperature</b>	4000K
<b>Colour rendering (CRI)</b>	80
<b>IP class</b>	30
<b>Nominal voltage</b>	220 – 240 V
<b>Colour</b>	WH-RAL9016
<b>UGR</b>	20,6

