


**ART.: 3111529**

SL713+ PL MP S/C

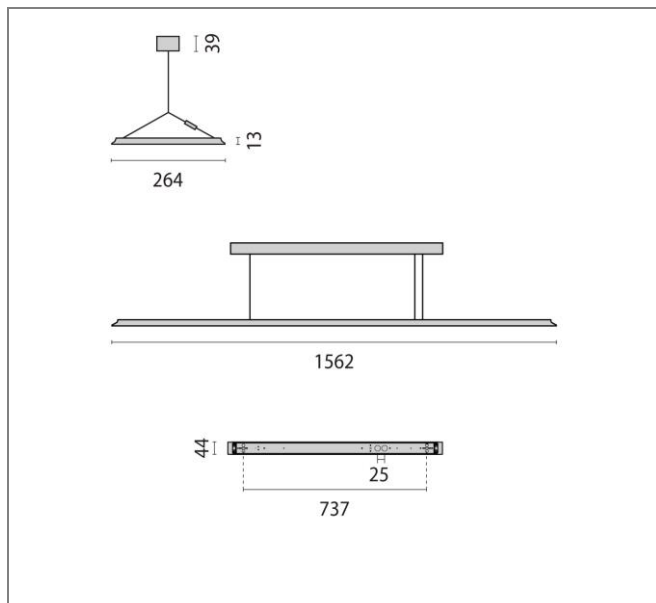

Art.: 3111529, SL713+ PL RXL 61 S/C 830 GR9006 MP, Suspended, LED luminaire for indoor, comprising: Extruded aluminium housing profile, powder-coated. Micro-prismatic diffuser for efficient light diffusion, glare reduction and a high uniformity. LED Sidelight-Technology for a homogenous light distribution over the entire area of the cover. Light engine can be replaced by means of a slide-in mechanism. Direct / indirect light distribution. VDU application suitable acc. to EN 12464-1. Colour rendering index Ra > 80. Colour tolerance according to MacAdam ≤ 3 SDCM. Complete with steel suspension cable (1.5 m), transparent power cord and canopy. Special colour versions available. Consult factory.

<b>Connected load</b>	69 W
<b>Luminous flux</b>	8950 lm
<b>Efficiency</b>	130 lm/W
<b>Colour temperature</b>	3000K
<b>Colour rendering (CRI)</b>	80
<b>IP class</b>	20
<b>Nominal voltage</b>	220 – 240 V
<b>Colour</b>	GR-RAL9006
<b>UGR</b>	≤ 16
<b>Glare control</b>	✓

