


**ART.: 3111594**

SL713+ PL MP S/C

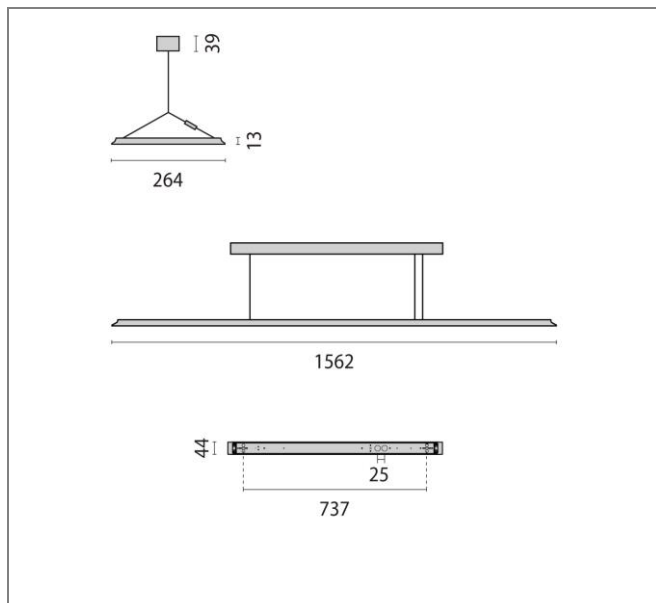

Art.: 3111594, SL713+ PL RXL 61 S/C 840 WH9016 DALI MP, Suspended, LED luminaire for indoor, comprising: Extruded aluminium housing profile, powder-coated. Micro-prismatic diffuser for efficient light diffusion, glare reduction and a high uniformity. LED Sidelight-Technology for a homogenous light distribution over the entire area of the cover. Light engine can be replaced by means of a slide-in mechanism. Direct / indirect light distribution. VDU application suitable acc. to EN 12464-1. Colour rendering index  $R_a > 80$ . Colour tolerance according to MacAdam  $\leq 3$  SDCM. Dimmable via TouchDIM®. DALI dimmable. Complete with steel suspension cable (1.5 m), transparent power cord and canopy. Special colour versions available. Consult factory.

|                        |             |
|------------------------|-------------|
| Connected load         | 69 W        |
| Luminous flux          | 9010 lm     |
| Efficiency             | 131 lm/W    |
| Colour temperature     | 4000K       |
| Colour rendering (CRI) | 80          |
| IP class               | 20          |
| Nominal voltage        | 220 – 240 V |
| Colour                 | WH-RAL9016  |
| UGR                    | $\leq 16$   |
| Glare control          | ✓           |

