


ART.: 3112443

SL629 PL CM prism d/i

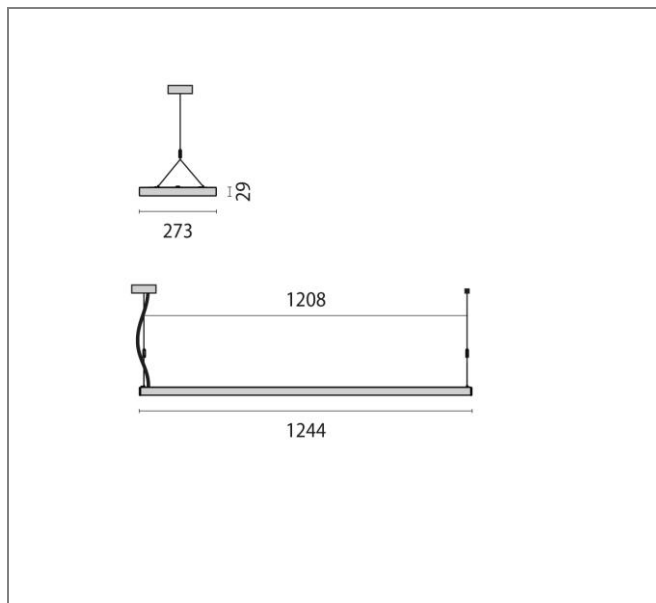

Art.: 3112443, SL629LED CP M 54 S/C 940 WH9016 DALI MP, Suspended luminaire systems, consisting of one or more luminaire modules and individually selectable components. Housing made of steel sheet. Die-cast aluminium connecting elements and end pieces, powder-coated. Prismatic diffuser for efficient light diffusion, glare reduction and a high level of uniformity.. Light distribution direct or direct/ indirect. Colour rendering index Ra > 90. Colour tolerance according to MacAdam ≤ 3 SDCM. DALI dimmable. Dimmable via TouchDIM®. VDU application suitable acc. to EN 12464-1. Special colour versions available. Consult factory. Please have a look for the components at the list of accessories.

Connected load	54 W
Luminous flux	6250 lm
Efficiency	116 lm/W
Colour temperature	4000K
Colour rendering (CRI)	90
IP class	20
Nominal voltage	220 – 240 V
Colour	WH-RAL9016
UGR	≤ 16
Glare control	✓

