


ART.: 3112451

SL629 PL prism d/i

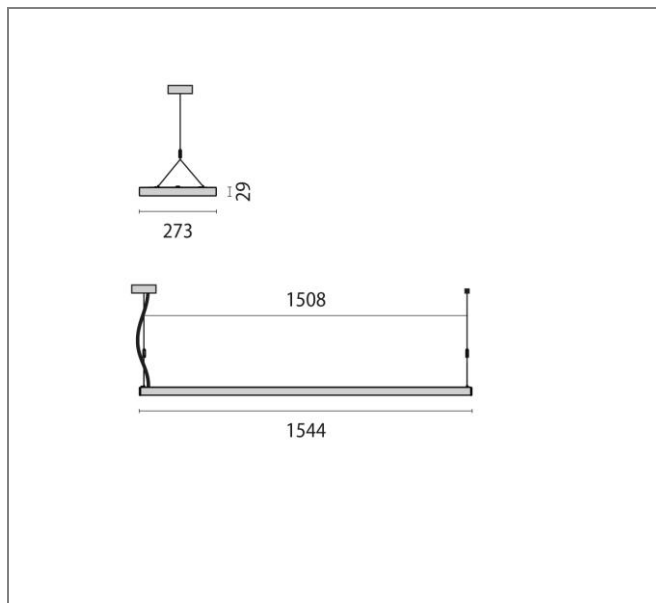

Art.: 3112451, SL629LED PL L 69 S/C 930 WH9016 DALI MP, Suspended, LED luminaire for indoor, comprising: Steel sheet housing, die-cast aluminium end caps, powder painted. Prismatic diffuser for efficient light diffusion, glare reduction and a high level of uniformity.. Direct / indirect light distribution. LED Sidelight-Technology for a homogenous light distribution over the entire area of the cover. Colour rendering index $R_a > 90$. Colour tolerance according to MacAdam ≤ 3 SDCM. DALI dimmable. Dimmable via TouchDIM®. Light engine can be replaced by means of a slide-in mechanism. Complete with steel suspension cable (1.5 m), transparent power cable and canopy. VDU application suitable acc. to EN 12464-1. Motion sensor available with task-oriented PIR detector and daylight control. Consult factory. Special colour versions available. Consult factory.

Connected load	69 W
Luminous flux	7860 lm
Efficiency	114 lm/W
Colour temperature	3000K
Colour rendering (CRI)	90
IP class	20
Nominal voltage	220 – 240 V
Colour	WH-RAL9016
UGR	≤ 16
Glare control	✓

