


**ART.: 3112480**

SL629 PL prism d/i

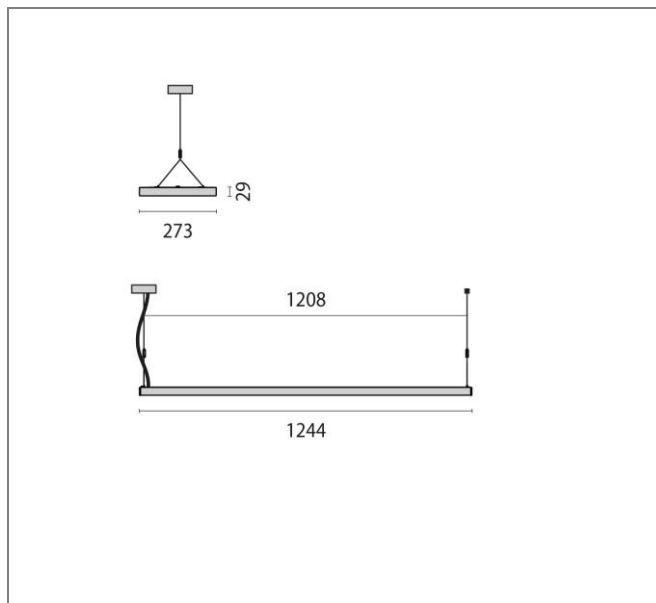

Art.: 3112480, SL629LED PL M 54 S/C 940 WH9016 MP, Suspended, LED luminaire for indoor, comprising: Steel sheet housing, die-cast aluminium end caps, powder painted. Prismatic diffuser for efficient light diffusion, glare reduction and a high level of uniformity.. Direct / indirect light distribution. LED Sidelight-Technology for a homogenous light distribution over the entire area of the cover. Colour rendering index  $R_a > 90$ . Colour tolerance according to MacAdam  $\leq 3$  SDCM. Light engine can be replaced by means of a slide-in mechanism. Complete with steel suspension cable (1.5 m), transparent power cable and canopy. VDU application suitable acc. to EN 12464-1. Motion sensor available with task-oriented PIR detector and daylight control. Consult factory. Special colour versions available. Consult factory.

<b>Connected load</b>	54 W
<b>Luminous flux</b>	6250 lm
<b>Efficiency</b>	116 lm/W
<b>Colour temperature</b>	4000K
<b>Colour rendering (CRI)</b>	90
<b>IP class</b>	20
<b>Nominal voltage</b>	220 – 240 V
<b>Colour</b>	WH-RAL9016
<b>UGR</b>	$\leq 16$
<b>Glare control</b>	✓

