


ART.: 3112561

SL764+ PL LV S/C

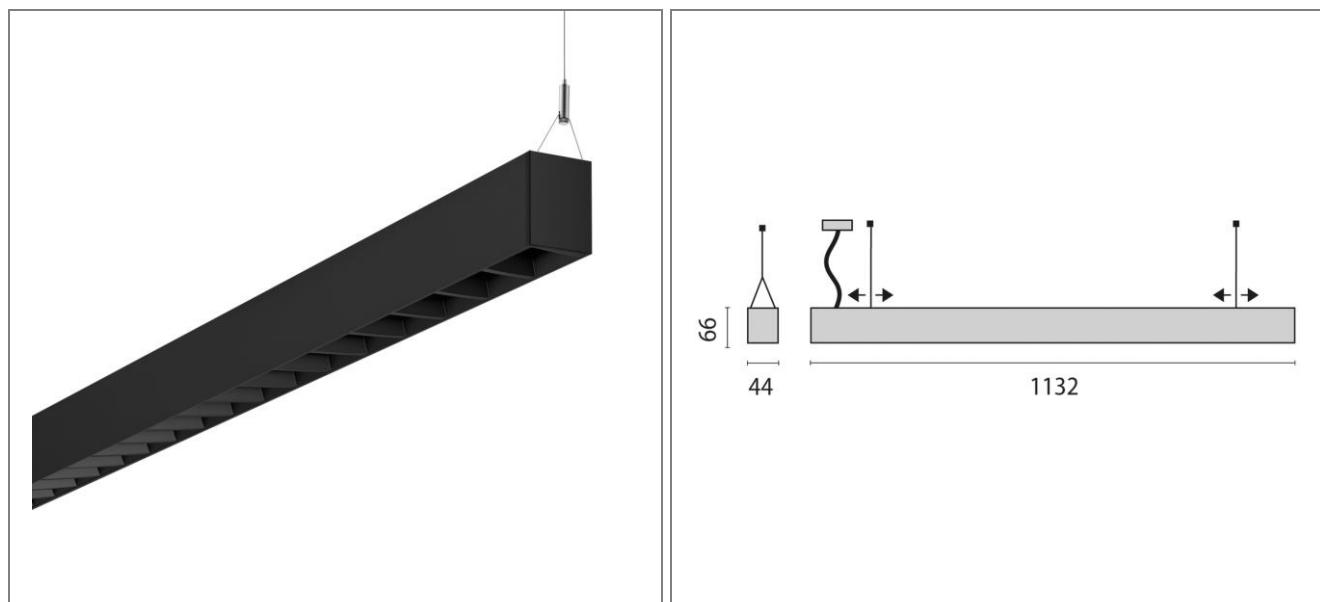

Art.: 3112561, SL764+ PL M 36 S/B 840 BK9005 LV, Suspended, LED luminaire for indoor, comprising: Extruded aluminium profile housing, die-cast aluminium end caps, painted. Black grid for maximum luminaire efficiency, glare reduction and a high uniformity. Streamlined, simple design with flush end caps. High-quality workmanship of profile connections for a perfect look. High economic efficiency thanks to luminaire efficiencies of up to 155 lm/W.

Predominantly direct light distribution. Through-wiring designed. Simple and convenient lighting installation.

Interchangeable lighting inserts. Colour rendering index Ra > 80. Colour tolerance according to MacAdam ≤ 3 SDCM.

Complete with steel suspension cable (1.5 m), transparent power cable and canopy. Many other luminaire designs and strip light configurations are available at www.light-performer.com.

| | |
|-------------------------------|-------------|
| Connected load | 41 W |
| Luminous flux | 5750 lm |
| Efficiency | 140 lm/W |
| Colour temperature | 4000K |
| Colour rendering (CRI) | 80 |
| IP class | 20 |
| Nominal voltage | 220 – 240 V |
| Colour | BK-RAL9005 |
| UGR | ≤ 16 |
| Glare control | ✓ |

