


ART.: 3112572

SL764+ PL LV S/C

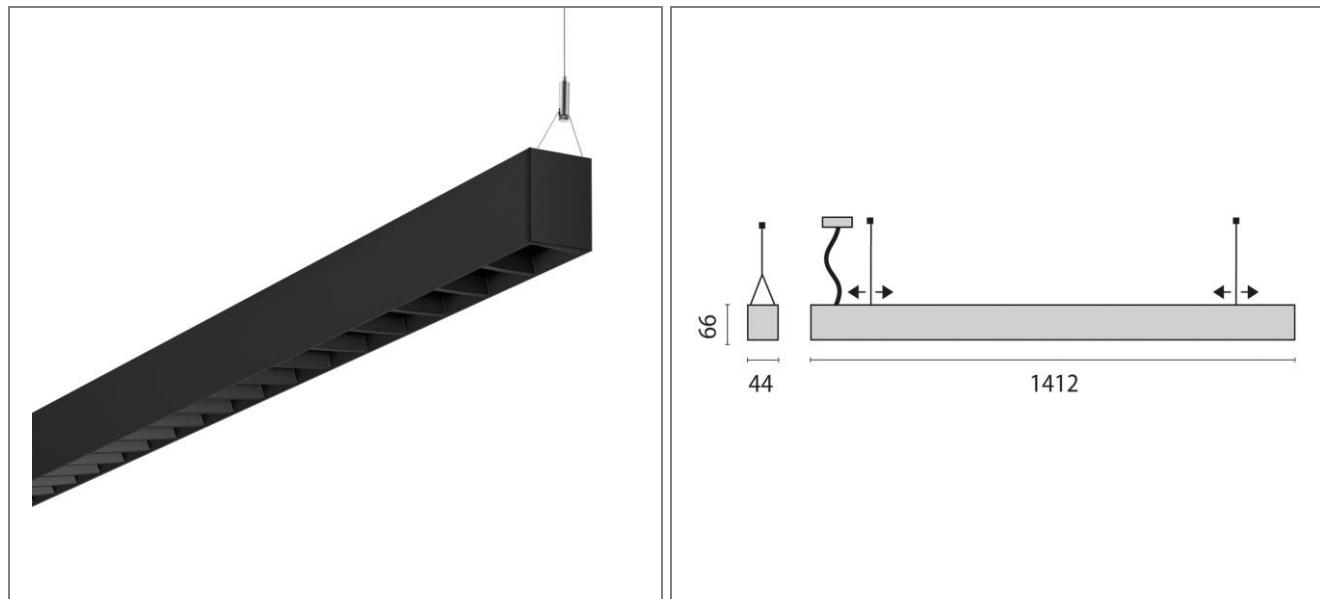

Art.: 3112572, SL764+ PL L 45 S/B 830 BK9005 DALI LV, Suspended, LED luminaire for indoor, comprising: Extruded aluminium profile housing, die-cast aluminium end caps, painted. Black grid for maximum luminaire efficiency, glare reduction and a high uniformity. Streamlined, simple design with flush end caps. High-quality workmanship of profile connections for a perfect look. High economic efficiency thanks to luminaire efficiencies of up to 155 lm/W.

Predominantly direct light distribution. Through-wiring designed. Simple and convenient lighting installation.

Interchangeable lighting inserts. Colour rendering index Ra > 80. Dimmable via TouchDIM®. DALI dimmable. Colour tolerance according to MacAdam ≤ 3 SDCM. Complete with steel suspension cable (1.5 m), transparent power cable and canopy. Many other luminaire designs and strip light configurations are available at www.light-performer.com.

Connected load	51 W
Luminous flux	6970 lm
Efficiency	137 lm/W
Colour temperature	3000K
Colour rendering (CRI)	80
IP class	20
Nominal voltage	220 – 240 V
Colour	BK-RAL9005
UGR	≤ 16
Glare control	✓

