


ART.: 3112585

SL764+ RF LV

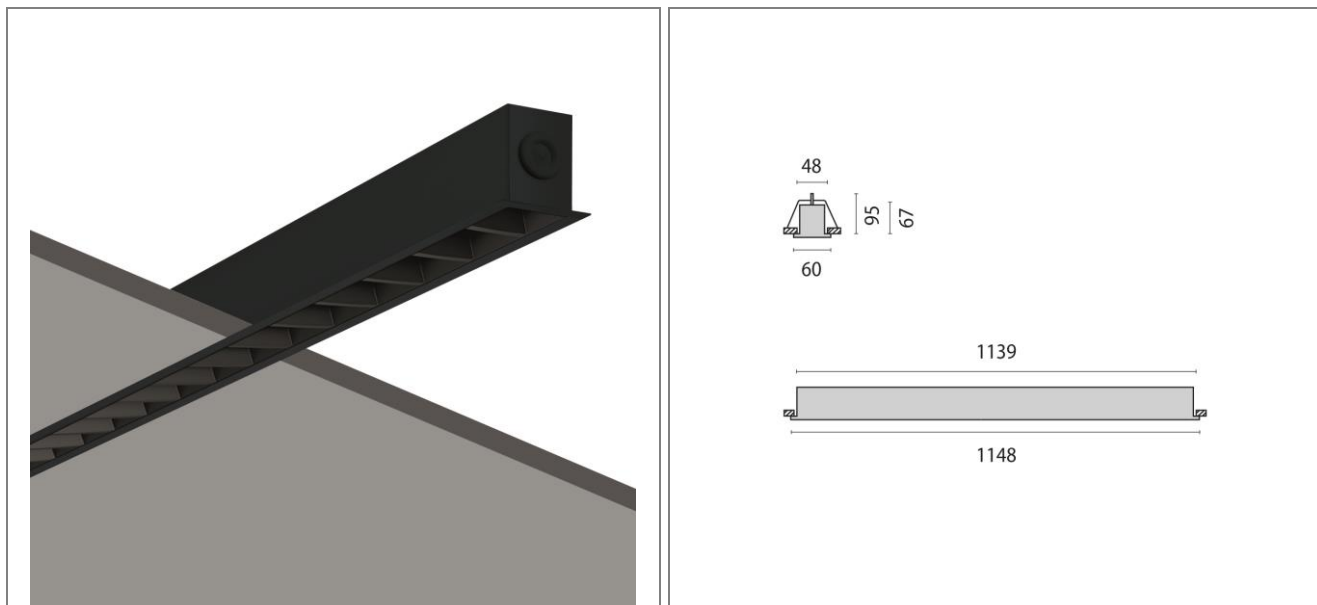

Art.: 3112585, SL764+ RF M 23 S/A 840 BK9005 DALI LV, Recessed LED luminaire for indoor, comprising: Extruded aluminium profile housing, die-cast aluminium end caps, painted. Black grid for maximum luminaire efficiency, glare reduction and a high uniformity. Streamlined, simple design with flush end caps. High-quality workmanship of profile connections for a perfect look. High economic efficiency thanks to luminaire efficiencies of up to 155 lm/W. Predominantly direct light distribution. Through-wiring designed. Simple and convenient lighting installation. Interchangeable lighting inserts. Colour rendering index Ra > 80. Dimmable via TouchDIM®. DALI dimmable. Colour tolerance according to MacAdam ≤ 3 SDCM. Includes recessed mounting kit. Many other luminaire designs and strip light configurations are available at www.light-performer.com.

Connected load	25 W
Luminous flux	3540 lm
Efficiency	142 lm/W
Colour temperature	4000K
Colour rendering (CRI)	80
IP class	20
Nominal voltage	220 – 240 V
Colour	BK-RAL9005
UGR	≤ 19
Glare control	✓

