


**ART.: 3112587**

SL764+ RF LV

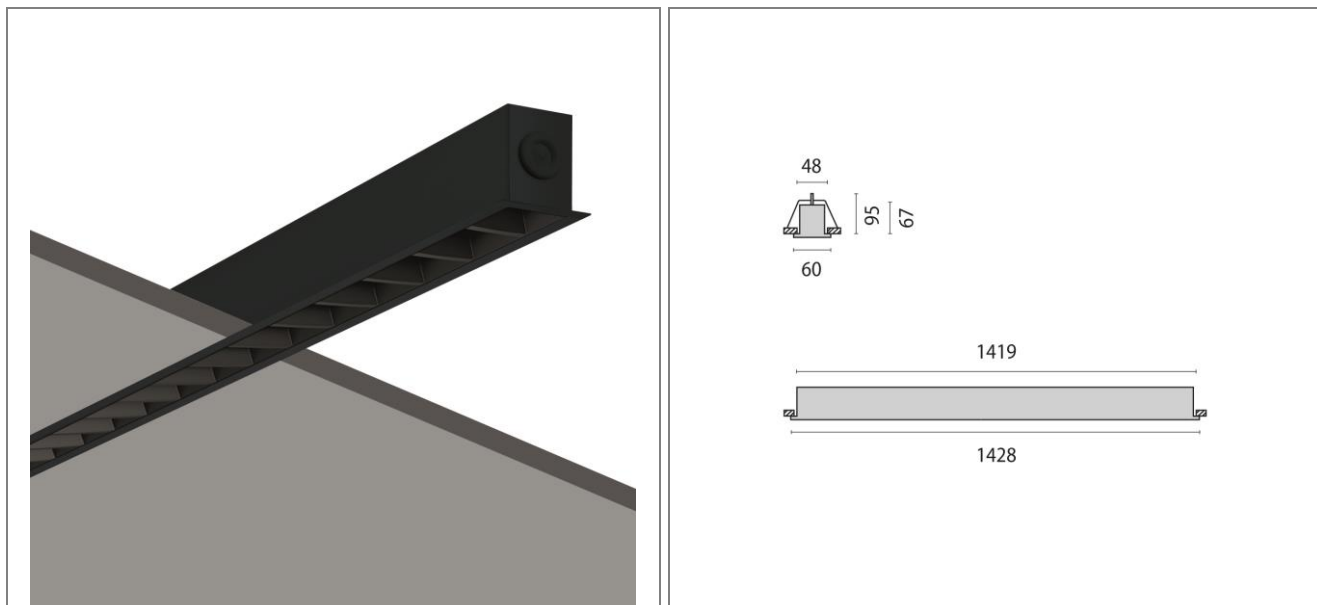

Art.: 3112587, SL764+ RF L 29 S/A 940 BK9005 DALI LV, Recessed LED luminaire for indoor, comprising: Extruded aluminium profile housing, die-cast aluminium end caps, painted. Black grid for maximum luminaire efficiency, glare reduction and a high uniformity. Streamlined, simple design with flush end caps. High-quality workmanship of profile connections for a perfect look. High economic efficiency thanks to luminaire efficiencies of up to 155 lm/W. Predominantly direct light distribution. Through-wiring designed. Simple and convenient lighting installation. Interchangeable lighting inserts. Colour rendering index Ra > 90. Dimmable via TouchDIM®. DALI dimmable. Colour tolerance according to MacAdam ≤ 3 SDCM. Includes recessed mounting kit. Many other luminaire designs and strip light configurations are available at [www.light-performer.com](http://www.light-performer.com).

|                               |             |
|-------------------------------|-------------|
| <b>Connected load</b>         | 32 W        |
| <b>Luminous flux</b>          | 3870 lm     |
| <b>Efficiency</b>             | 121 lm/W    |
| <b>Colour temperature</b>     | 4000K       |
| <b>Colour rendering (CRI)</b> | 90          |
| <b>IP class</b>               | 20          |
| <b>Nominal voltage</b>        | 220 – 240 V |
| <b>Colour</b>                 | BK-RAL9005  |
| <b>UGR</b>                    | ≤ 19        |
| <b>Glare control</b>          | ✓           |

