


**ART.: 3112745**

SL713+ PL MP S/C

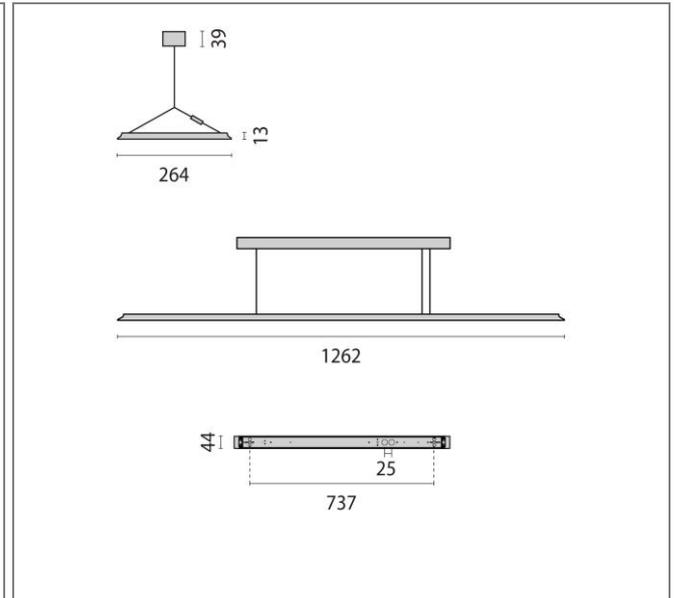

Art.: 3112745, SL713+ PL RL 50 S/C 8TW WH9016 BT MP, Suspended, LED luminaire for indoor, comprising: Extruded aluminium housing profile, powder-coated. Micro-prismatic diffuser for efficient light diffusion, glare reduction and a high uniformity. LED Sidelight-Technology for a homogenous light distribution over the entire area of the cover. Light engine can be replaced by means of a slide-in mechanism. Direct / indirect light distribution. VDU application suitable acc. to EN 12464-1. Colour rendering index Ra > 80. Colour tolerance according to MacAdam ≤ 3 SDCM. Light colour and brightness manually adjustable via Tunable White control (DALI DT8). Bluetooth sensor component for use with dimSMART! light control. Complete with steel suspension cable (1.5 m), transparent power cord and canopy. Special colour versions available. Consult factory.

<b>Connected load</b>	53 W
<b>Luminous flux</b>	6320 lm
<b>Efficiency</b>	119 lm/W
<b>Colour temperature</b>	TW 2700-6500K
<b>Colour rendering (CRI)</b>	80
<b>IP class</b>	20
<b>Nominal voltage</b>	220 – 240 V
<b>Colour</b>	WH-RAL9016
<b>UGR</b>	≤ 16
<b>Glare control</b>	✓

