


**ART.: 3112748**

SL713+ PL MP S/C

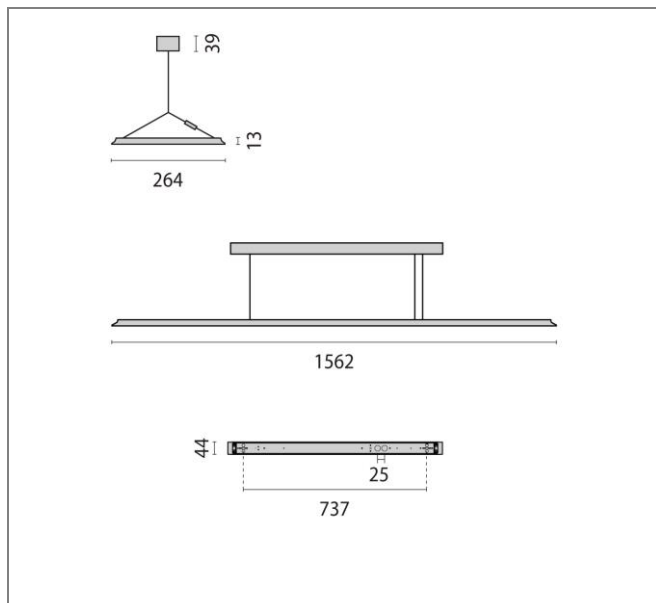

Art.: 3112748, SL713+ PL RXL 65 S/C 8TW GR9006 BT MP, Suspended, LED luminaire for indoor, comprising: Extruded aluminium housing profile, powder-coated. Micro-prismatic diffuser for efficient light diffusion, glare reduction and a high uniformity. LED Sidelight-Technology for a homogenous light distribution over the entire area of the cover. Light engine can be replaced by means of a slide-in mechanism. Direct / indirect light distribution. VDU application suitable acc. to EN 12464-1. Colour rendering index  $R_a > 80$ . Colour tolerance according to MacAdam  $\leq 3$  SDCM. Light colour and brightness manually adjustable via Tunable White control (DALI DT8). Bluetooth sensor component for use with dimSMART! light control. Complete with steel suspension cable (1.5 m), transparent power cord and canopy. Special colour versions available. Consult factory.

Connected load	67 W
Luminous flux	8040 lm
Efficiency	120 lm/W
Colour temperature	TW 2700-6500K
Colour rendering (CRI)	80
IP class	20
Nominal voltage	220 – 240 V
Colour	GR-RAL9006
UGR	$\leq 16$
Glare control	✓

