


ART.: 3113765

SL764+ PL LV S/C

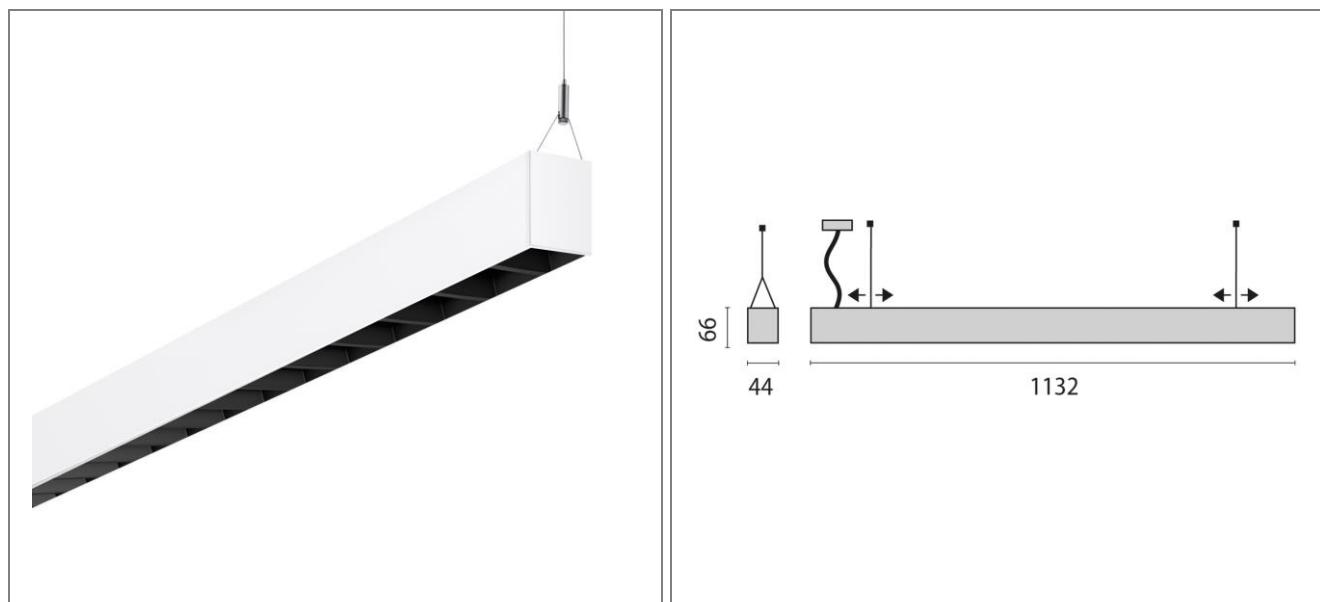

Art.: 3113765, SL764+ PL, Direct/indirect, 41W, 4000K, Driver dali, 1132mm, Symmetrical, > 75°, White, Suspended, LED luminaire for indoor, comprising: Extruded aluminium profile housing, die-cast aluminium end caps, painted. Streamlined, simple design with flush end caps. High-quality workmanship of profile connections for a perfect look. Black grid for maximum luminaire efficiency, glare reduction and a high uniformity. High economic efficiency thanks to luminaire efficiencies of up to 155 lm/W. Through-wiring designed. Simple and convenient lighting installation. Interchangeable lighting inserts. Direct light distribution. Colour rendering index Ra > 80. Colour tolerance according to MacAdam ≤ 3 SDCM. Complete with steel suspension cable (1.5 m), transparent power cable and canopy. Many other luminaire designs and strip light configurations are available at [www.light-performer.com](http://www.light-performer.com).

<b>Connected load</b>	41 W
<b>Luminous flux</b>	5030 lm
<b>Efficiency</b>	123 lm/W
<b>Colour temperature</b>	4000K
<b>Colour rendering (CRI)</b>	90
<b>IP class</b>	30
<b>Nominal voltage</b>	220 – 240 V
<b>Colour</b>	WH-RAL9016
<b>UGR</b>	≤ 16
<b>Glare control</b>	✓

