


ART.: 3113767

SL764+ PL LV S/C

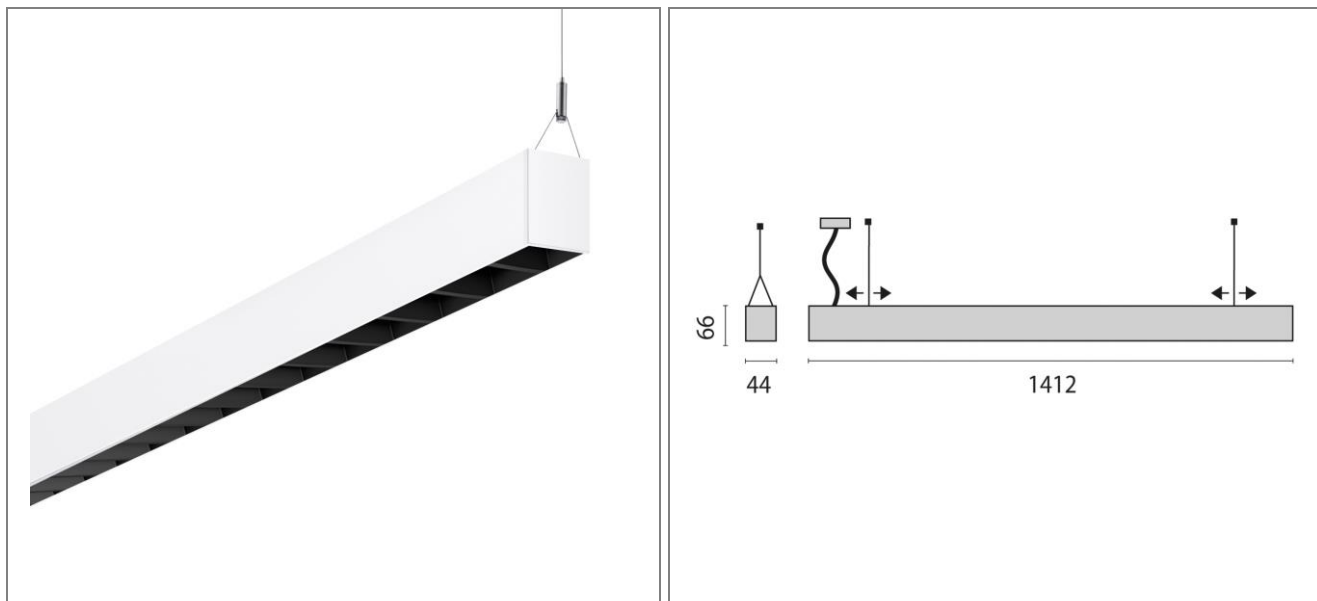

Art.: 3113767, SL764+ PL, Direct/indirect, 51W, 4000K, Driver dali, 1412mm, Symmetrical, > 75°, White, Suspended, LED luminaire for indoor, comprising: Extruded aluminium profile housing, die-cast aluminium end caps, painted. Streamlined, simple design with flush end caps. High-quality workmanship of profile connections for a perfect look. Black grid for maximum luminaire efficiency, glare reduction and a high uniformity. High economic efficiency thanks to luminaire efficiencies of up to 155 lm/W. Through-wiring designed. Simple and convenient lighting installation. Interchangeable lighting inserts. Direct light distribution. Colour rendering index Ra > 80. Colour tolerance according to MacAdam ≤ 3 SDCM. Complete with steel suspension cable (1.5 m), transparent power cable and canopy. Many other luminaire designs and strip light configurations are available at www.light-performer.com.

Connected load	51 W
Luminous flux	6280 lm
Efficiency	123 lm/W
Colour temperature	4000K
Colour rendering (CRI)	90
IP class	30
Nominal voltage	220 – 240 V
Colour	WH-RAL9016
UGR	≤ 16
Glare control	✓

