


SMALL LINE SL REFLECTOR

Part number 3115402

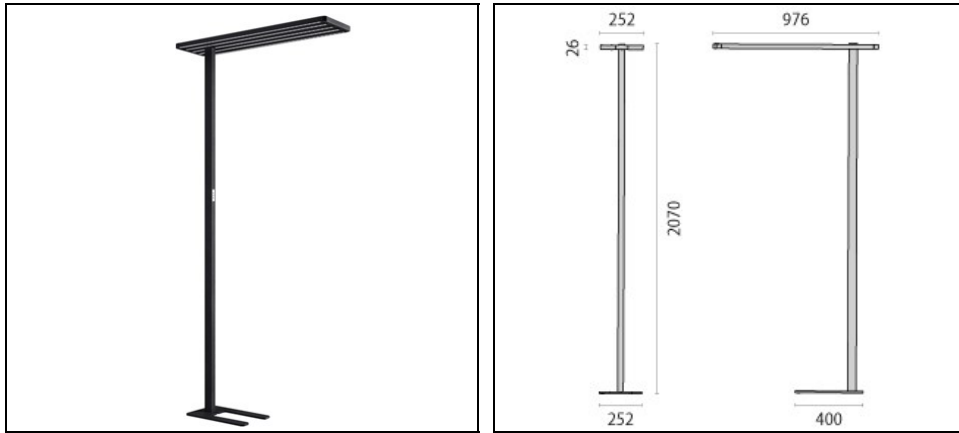

Description

Free-standing LED luminaire for indoor, comprising:

- Pole and light plate made of extruded aluminium profile, head piece made of die cast aluminium, sheet steel base, powder-coated
- Slender plates with open spaces give the luminaire a uniquely delicate design
- Practical U-shaped base enables luminaire to be positioned flexibly and flush to a writing desk

The luminaire is available with different light engines:

- Gear tray with high-shine multifaceted reflectors made of pure aluminium for maximum luminaire efficiency and neutral colour rendering
- Direct / indirect light distribution
- Direct and indirect portions individually dimmable using TouchDIM® (for version with sensor: direct and indirect portions dimmable in tandem using TouchDIM®)
- Colour tolerance according to MacAdam ≤ 3 SDCM
- VDU application suitable acc. to EN 12464-1
- Sensor device available with task oriented PIR detector and daylight control
- Special colour versions available. Consult factory
- Design by BÜRO SOMMER

To maintain the regular updating of our products, PERFORMANCE IN LIGHTING reserves the right to make changes without prior notice. For the most up to date information we always recommend you read the latest version published on the website www.performanceinlighting.com. Delivered luminaire lumen outputs and power consumptions, including losses, are subject to a tolerance of +/- 7%, and unless otherwise stated the values apply to an ambient temperature of 25°C. Terms of warranty are available at www.performanceinlighting.com/qr/qr/company/terms-and-conditions

Product data

ETIM Group:	EG000027	ETIM Class:	EC000300
-------------	----------	-------------	----------

General information

Lampholder:	LED	Light source:	LED
Lightsource lumen output [lm]:	12710	Luminaire lumen output [lm]:	9390
Luminaire wattage [W]:	88 W	Luminous efficacy [lm/W]:	0
CRI:	80	Kelvin:	3000
Colour / Finish:	BK-RAL9005 / Black RAL9005 / Textured	IP degree of protection:	IP20
IK-J-xxIP:	IK05 0.70J xx3	Insulation class:	I
Optic:	SYMMETRIC DIRECT-INDIRECT	Beam angle:	2 x 42° / 42°
Net weight [kg]:	13.051		

Mechanical features

Shape:	RECTANGULAR	Housing material:	ALUMINIUM
Glow wire test [°C]:	650 °C		

Electrical features

Voltage type:	AC	Power factor / COS Φ:	>0.9
---------------	----	-----------------------	------

Installation


Application area:	Indoor	Mounting type:	Free standing
Min. ambient temperature [°C]:	10	Max. ambient temperature [°C]:	40
Min. distance from lighted object [m]:	0.00		

Light features

MacAdam:	3	Lumen maintenance:	L80B10@50000h
Distribution of light emission:	Direct/ Indirect	DFF - Downward Flux Fraction [%]:	46
UFF - Upward Flux Fraction [%]:	54	UGR max.:	10.0

To maintain the regular updating of our products, PERFORMANCE IN LIGHTING reserves the right to make changes without prior notice. For the most up to date information we always recommend you read the latest version published on the website www.performanceinlighting.com. Delivered luminaire lumen outputs and power consumptions, including losses, are subject to a tolerance of +/- 7%, and unless otherwise stated the values apply to an ambient temperature of 25°C. Terms of warranty are available at www.performanceinlighting.com/qr/qr/company/terms-and-conditions

Photometric data

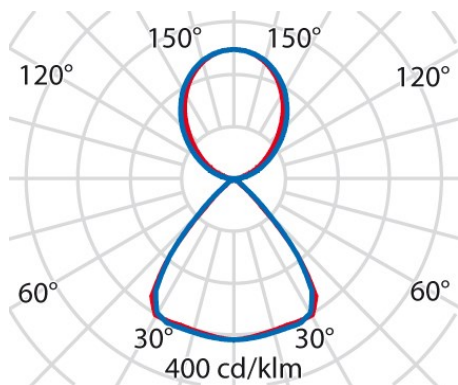

To maintain the regular updating of our products, PERFORMANCE IN LIGHTING reserves the right to make changes without prior notice. For the most up to date information we always recommend you read the latest version published on the website www.performanceinlighting.com. Delivered luminaire lumen outputs and power consumptions, including losses, are subject to a tolerance of +/- 7%, and unless otherwise stated the values apply to an ambient temperature of 25°C. Terms of warranty are available at www.performanceinlighting.com/qr/qf/company/terms-and-conditions