


SL764+ SL 1 LV

Part number 3115662

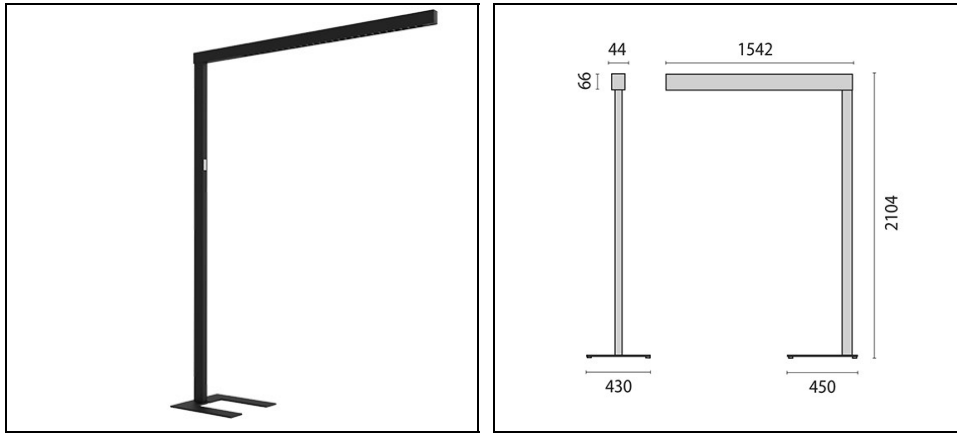

Description

Free-standing LED luminaire for indoor, comprising:

- Steel sheet head, extruded aluminium profile post, steel sheet base, polyester powder coat finish
- Practical U-shaped base enables luminaire to be positioned flexibly and flush to a writing desk
- Black grid for maximum luminaire efficiency, glare reduction and a high uniformity
- Direct / indirect light distribution
- VDU application suitable acc. to EN 12464-1
- Sensor device available with task oriented PIR detector and daylight control
- Extended detection range detects activity above the workstations and controls the luminaire head (direct and indirect section) in parallel
- The sensor's detection range can be finely adjusted via the shutter
- Direct and indirect light section can be switched and dimmed separately via push-buttons
- Colour tolerance according to MacAdam ≤ 3 SDCM
- Complete with flexible power cord with plug
- Special colour versions available. Consult factory

To maintain the regular updating of our products, PERFORMANCE IN LIGHTING reserves the right to make changes without prior notice. For the most up to date information we always recommend you read the latest version published on the website www.performanceinlighting.com. Delivered luminaire lumen outputs and power consumptions, including losses, are subject to a tolerance of +/- 7%, and unless otherwise stated the values apply to an ambient temperature of 25°C. Terms of warranty are available at www.performanceinlighting.com/qr/qr/company/terms-and-conditions

Product data

ETIM Group:	EG000027	ETIM Class:	EC000300
-------------	----------	-------------	----------

General information

Lampholder:	LED	Light source:	LED
Luminaire lumen output [lm]:	9830	Luminaire wattage [W]:	71 W
Luminous efficacy [lm/W]:	0	CRI:	80
Kelvin:	4000	Colour / Finish:	BK-RAL9005 / Black RAL9005 / Textured
IP degree of protection:	IP40	IK-J-xxIP:	IK05 0.70J xx3
Insulation class:	I	Optic:	SYMMETRIC DIRECT-INDIRECT
Beam angle:	2 x 38°/39°	Net weight [kg]:	17.845

Mechanical features

Shape:	RECTANGULAR	Housing material:	ALUMINIUM
Diffuser material:	PLASTIC	Glow wire test [°C]:	650 °C

Electrical features

Voltage type:	AC	Power factor / COS Φ:	>0.9
Inrush current [A/μs]:	49 / 304		

Installation


Application area:	Indoor	Mounting type:	Free standing
Min. ambient temperature [°C]:	10	Max. ambient temperature [°C]:	40
Min. distance from lighted object [m]:	0.00		

Light features

MacAdam:	3	Lumen maintenance:	L80B10@50000h
Distribution of light emission:	Direct/ Indirect	DFF - Downward Flux Fraction [%]:	36
UFF - Upward Flux Fraction [%]:	64	UGR max.:	13.0

To maintain the regular updating of our products, PERFORMANCE IN LIGHTING reserves the right to make changes without prior notice. For the most up to date information we always recommend you read the latest version published on the website www.performanceinlighting.com. Delivered luminaire lumen outputs and power consumptions, including losses, are subject to a tolerance of +/- 7%, and unless otherwise stated the values apply to an ambient temperature of 25°C. Terms of warranty are available at www.performanceinlighting.com/qr/qr/company/terms-and-conditions

Photometric data

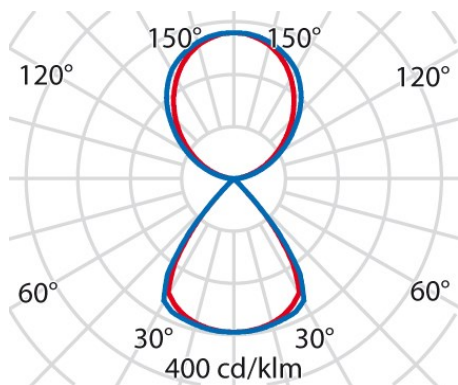

To maintain the regular updating of our products, PERFORMANCE IN LIGHTING reserves the right to make changes without prior notice. For the most up to date information we always recommend you read the latest version published on the website www.performanceinlighting.com. Delivered luminaire lumen outputs and power consumptions, including losses, are subject to a tolerance of +/- 7%, and unless otherwise stated the values apply to an ambient temperature of 25°C. Terms of warranty are available at www.performanceinlighting.com/qr/qr/company/terms-and-conditions