

# SL764+ PL MP

Part number 3115842



## Description

Suspended, LED luminaire for indoor, comprising:

- Extruded aluminium profile housing, die-cast aluminium end caps, powder-coated
- Micro-prismatic diffuser for efficient light distribution, glare reduction and high uniformity (MP)
- Streamlined, simple design with flush end caps
- High-quality workmanship of profile connections for a perfect look
- Direct / indirect light distribution
- Through-wiring designed
- Simple and convenient lighting installation
- Interchangeable lighting inserts
- Colour tolerance according to MacAdam  $\leq 3$  SDCM
- Complete with steel suspension cable (1.5 m), transparent power cable and canopy
- Continuous mounted options and many other configurations are available at [www.light-performer.com](http://www.light-performer.com)

To maintain the regular updating of our products, PERFORMANCE IN LIGHTING reserves the right to make changes without prior notice. For the most up to date information we always recommend you read the latest version published on the website [www.performanceinlighting.com](http://www.performanceinlighting.com). Delivered luminaire lumen outputs and power consumptions, including losses, are subject to a tolerance of +/- 7%, and unless otherwise stated the values apply to an ambient temperature of 25°C. Terms of warranty are available at [www.performanceinlighting.com/qr/qr/company/terms-and-conditions](http://www.performanceinlighting.com/qr/qr/company/terms-and-conditions)

**Product data**

ETIM Group:	EG000027	ETIM Class:	EC001743
-------------	----------	-------------	----------

**General information**

Lampholder:	LED	Light source:	LED
Lightsource lumen output [lm]:	5510	Luminaire lumen output [lm]:	4460
Luminaire wattage [W]:	32 W	Luminous efficacy [lm/W]:	0
CRI:	90	Kelvin:	4000
Colour / Finish:	WH-RAL9016 / White RAL9016 / Textured	IP degree of protection:	IP40
IK-J-xxIP:	IK05 0.70J xx3	Insulation class:	I
Optic:	SYMMETRIC DIRECT-INDIRECT	Beam angle:	2 x 39°/41°
Net weight [kg]:	5.961		

**Mechanical features**

Shape:	RECTANGULAR	Housing material:	ALUMINIUM
Glow wire test [°C]:	650 °C		

**Electrical features**

Voltage type:	AC	Power factor / COS Φ:	>0.9
Inrush current [A/μs]:	35 / 170		

**Installation**

Application area:	Indoor	Mounting type:	Suspended
Min. ambient temperature [°C]:	10	Max. ambient temperature [°C]:	40
Min. distance from lighted object [m]:	0.00		


**Light features**

MacAdam:	3	Lumen maintenance:	L80B10@50000h
Distribution of light emission:	Direct/ Indirect	DFF - Downward Flux Fraction [%]:	50
UFF - Upward Flux Fraction [%]:	50	UGR max.:	17.0

To maintain the regular updating of our products, PERFORMANCE IN LIGHTING reserves the right to make changes without prior notice. For the most up to date information we always recommend you read the latest version published on the website [www.performanceinlighting.com](http://www.performanceinlighting.com). Delivered luminaire lumen outputs and power consumptions, including losses, are subject to a tolerance of +/- 7%, and unless otherwise stated the values apply to an ambient temperature of 25°C. Terms of warranty are available at [www.performanceinlighting.com/qr/qr/company/terms-and-conditions](http://www.performanceinlighting.com/qr/qr/company/terms-and-conditions)

Photometric data

---

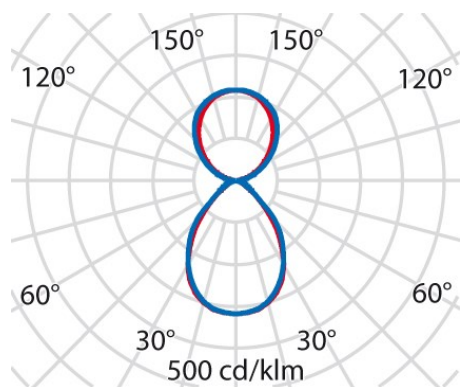

---

To maintain the regular updating of our products, PERFORMANCE IN LIGHTING reserves the right to make changes without prior notice. For the most up to date information we always recommend you read the latest version published on the website [www.performanceinlighting.com](http://www.performanceinlighting.com). Delivered luminaire lumen outputs and power consumptions, including losses, are subject to a tolerance of +/- 7%, and unless otherwise stated the values apply to an ambient temperature of 25°C. Terms of warranty are available at [www.performanceinlighting.com/qr/qr/company/terms-and-conditions](http://www.performanceinlighting.com/qr/qr/company/terms-and-conditions)