


**ART.: 810711363001**

DLSB100 LED OPAL COVER - 95 mm

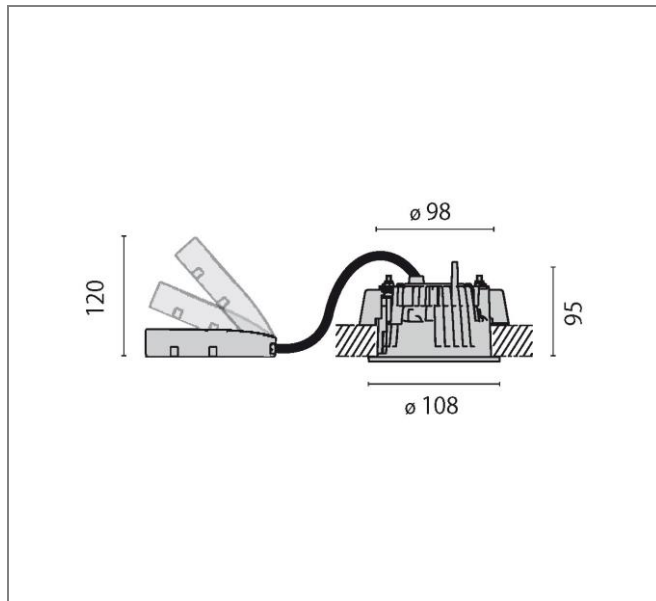

Art.: 810711363001, DLSB100 LED, Opal-white pmma diffuser, 14W, 3000K, Driver dali, Direct, White, Recessed round LED downlight for indoors, consisting of: Multi-purpose die-cast aluminium housing combines all functions: heat-sinking, ceiling trim, ceiling brackets and gear tray connection, Light-tight housing, Suitable for ceiling tile thickness from 1-25 mm Recessed frosted diffuser for optimal light distribution and high homogeneity, White modular reflector, ABS injection-molded with light-tight connection of LED board, Excellent heat dissipation through die-cast aluminium heat sink with FAST (Flexible Air Stream) Technology, Colour rendering index  $R_a > 80$ , Colour tolerance according to MacAdam  $\leq 3$  SDCM Also dimmable via TouchDIM®, Complete with electric converter, Protection class IP20 (IP54 for light emission surface for installation in closed ceilings)

<b>Connected load</b>	14 W
<b>Luminous flux</b>	1060 lm
<b>Efficiency</b>	76 lm/W
<b>Colour temperature</b>	3000K
<b>Colour rendering (CRI)</b>	80
<b>IP class</b>	20
<b>Nominal voltage</b>	220 – 240 V
<b>Colour</b>	RAL 9016
<b>UGR</b>	25,6

