PERFORMANCE
iN LIGHTING

ART.: 815711834001

DLSB150 LED OPAL COVER - 95 mm

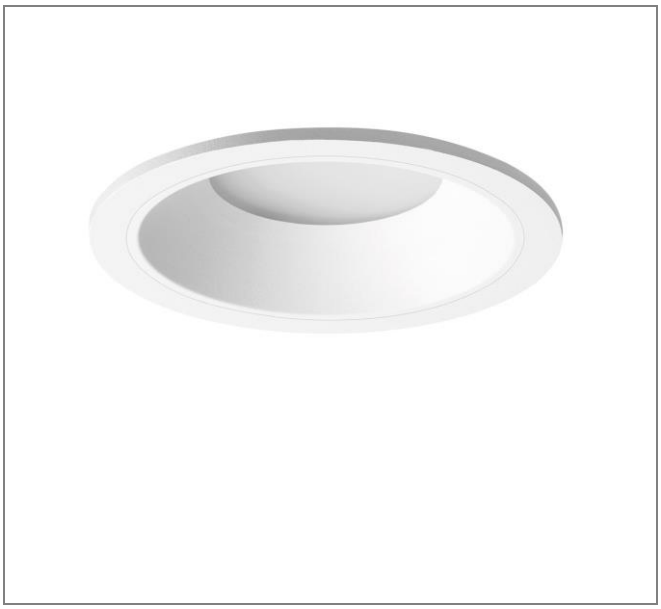

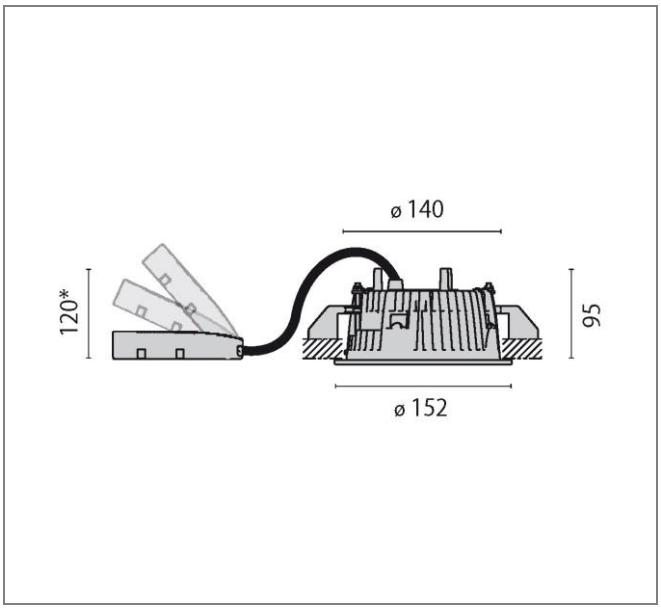

Art.: 815711834001, DLSB150 LED, Opal-white pmma diffuser, 19W, 4000K, Driver static, Symmetrical - direct, White, Recessed round LED downlight for indoors, consisting of: / Multi-purpose die-cast aluminium housing combines all functions: heat-sinking, ceiling trim, ceiling brackets and gear tray connection / Light-tight housing / Suitable for ceiling tile thickness from 1-25 mm / Recessed frosted diffuser for optimal light distribution and high homogeneity / White modular reflector, ABS injection-molded with light-tight connection of LED board / Excellent heat dissipation through die-cast aluminium heat sink with FAST (Flexible Air Stream) Technology / Colour rendering index Ra > 80 / Colour tolerance according to MacAdam = 3 SDCM / Complete with electric converter / Protection class IP54 (for light emission surface for installation in closed ceilings)

Connected load	19 W
Luminous flux	1700 lm
Efficiency	90 lm/W
Colour temperature	4000K
Colour rendering (CRI)	80
IP class	20
Nominal voltage	220 – 240 V
Colour	WH-RAL9016
UGR	25,5

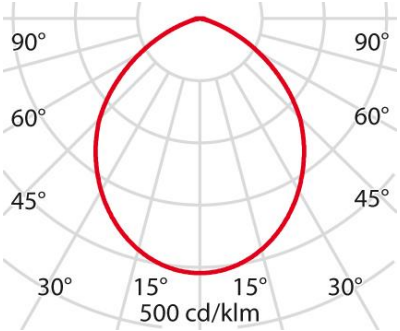

Performance in Lighting GmbH | Stapelner Str. 1 + 3 | 38644 Goslar | Germany | Tel. +49 (0) 5321 / 37 77-0 | Fax +49 (0) 53 21 / 37 77-99
info.de@pil.lighting | www.light-performer.com | www.performanceinlighting.com