
PERFORMANCE IN LIGHTING

ART.: 8300591236400



FL300EB LED OPAL COVER

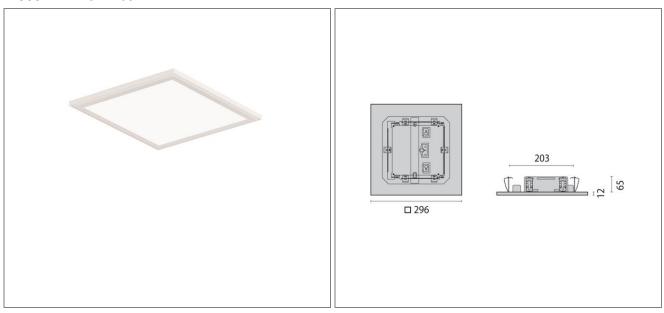

Art.: 8300591236400, FL300 EB LED, Opal-white pmma diffuser, 27W, 4000K, Driver dali, Direct, White, Recessed quadratic LED luminaire for indoors, consisting of: Housing made of extruded aluminium profile, powder-coated, LED Sidelight-Technology and light orienting plastic optic for a homogenous light distribution over the entire area of the cover Colour rendering index Ra > 80, Colour tolerance according to MacAdam ≤ 3 SDCM Also dimmable via TouchDIM[®], Complete with electric converter

Connected load
Luminous flux
Efficiency
Colour temperature
Colour rendering (CRI)
IP class
Nominal voltage
Colour
UGR

27 W 2460 lm

80 20

weiß 21,4

91 lm/W 4000K

220 – 240 V

90° 90° 60° 60° 45° 45° 30° 15° 15° 30° 400 cd/klm