


ART.: 8555661516310

FL ROUND 555 AB MP CORONA

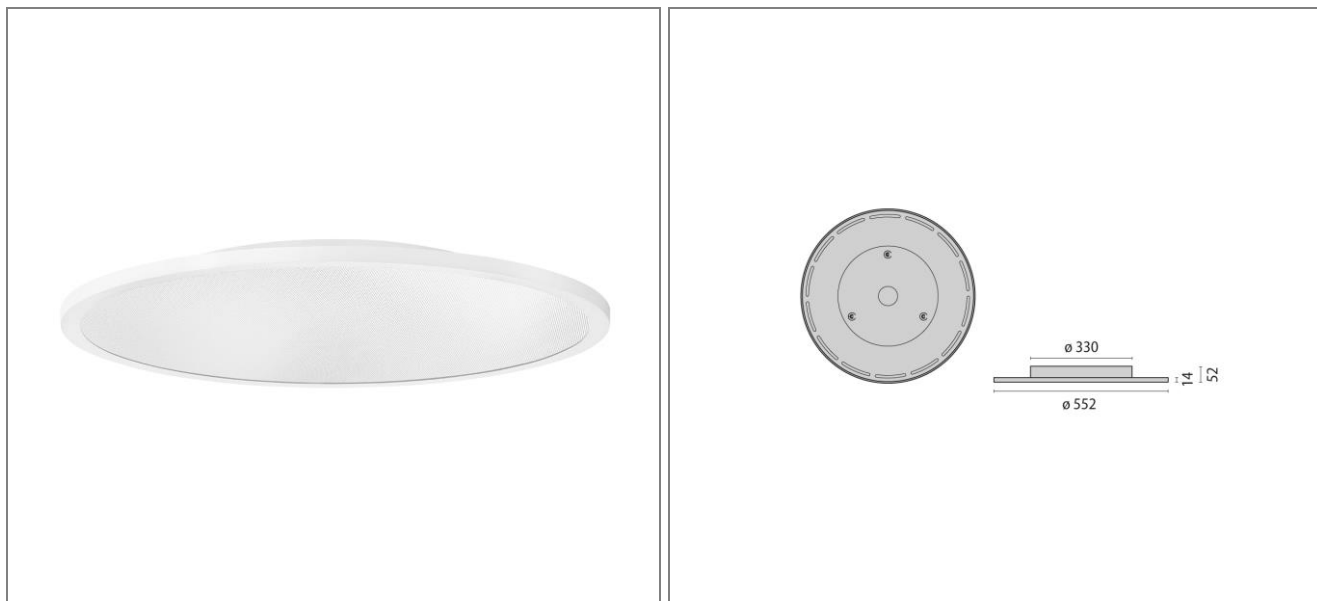

Art.: 8555661516310, FL ROUND 555 AB, Direct/indirect, 50W, 3000K, Driver dali, 552mm, Symmetrical, > 75°, White, Wall and ceiling mounted LED luminaire for indoor, comprising: Housing made from sheet steel and diecast aluminium, powder coated. Micro-prismatic diffuser for efficient light diffusion, glare reduction and a high uniformity. LED Sidelight-Technology and light orienting plastic optic for a homogenous light distribution over the entire area of the diffuser. Predominantly direct light distribution. VDU application suitable acc. to EN 12464 -1. Colour rendering index Ra > 80. Colour tolerance according to MacAdam ≤ 3 SDCM. Dimmable via TouchDIM®. Built-in driver.

Connected load	50 W
Luminous flux	5970 lm
Efficiency	119 lm/W
Colour temperature	3000K
Colour rendering (CRI)	80
IP class	20
Nominal voltage	220 – 240 V
Colour	WH-RAL9016
UGR	≤ 22

