


ART.: 8600661403400

FL SQUARE 600 SM MP

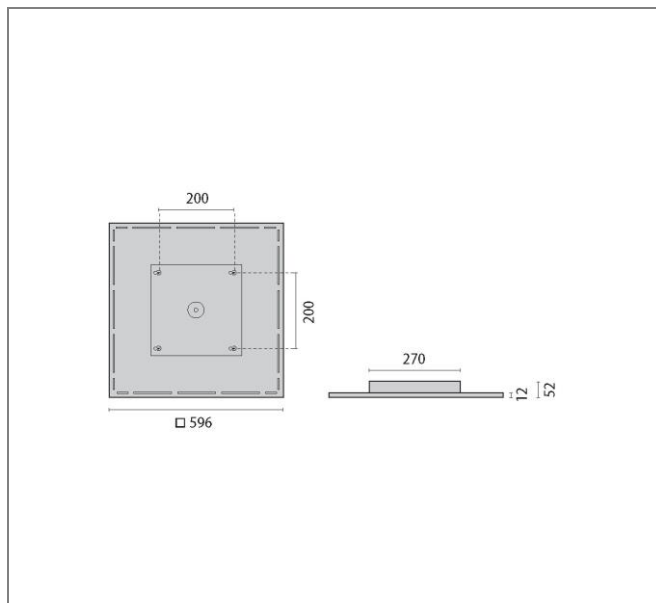

Art.: 8600661403400, FL SQUARE SM, Direct/indirect, 40W, 4000K, Driver static, 596mm, Symmetrical, > 75°, White, Surface-mounted quadratic LED luminaire for indoors, comprising of: Housing made of extruded aluminium profile, powder-coated / Diamond prism cover for efficient light control, minimisation of glare and a high uniformity / Predominantly direct light distribution / Colour rendering index Ra > 80 / Colour tolerance according to MacAdam = 3 SDCM / LED Sidelight-Technology for a homogenous light distribution over the entire area of the cover / Complete with electric converter / VDU application suitable acc. to EN 12464-1

Connected load	40 W
Luminous flux	4950 lm
Efficiency	124 lm/W
Colour temperature	4000K
Colour rendering (CRI)	80
IP class	20
Nominal voltage	220 – 240 V
Colour	WH-RAL9016
UGR	≤ 19
Glare control	✓

