


**ART.: 8629261283318**

SL629 PL CM PRISM

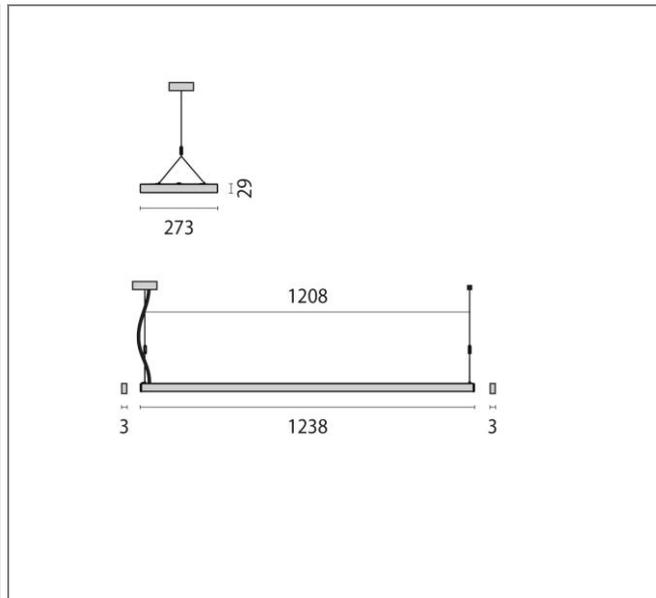

Art.: 8629261283318, SL629PL LB, Micro-prism, 26W, 3000K, Driver static, 1238mm, Symmetrical - direct, White, Suspended luminaire systems, consisting of one or more luminaire-modules and individually selectable components. Housing made of steel sheet, powder-coated / Connecting elements and end pieces made of die-cast aluminium, powder-coated / Prismatic cover for efficient light diffusion, glare reduction and a high level of uniformity / Light distribution direct or direct/ indirect / Colour rendering index Ra > 80 / Colour tolerance according to MacAdam = 3 SDCM / Dimmable via TouchDIM® / VDU application suitable acc. to EN 12464-1 / Special colour versions available upon request / Please have a look for the components at the list of accessories

<b>Connected load</b>	26 W
<b>Luminous flux</b>	3040 lm
<b>Efficiency</b>	117 lm/W
<b>Colour temperature</b>	3000K
<b>Colour rendering (CRI)</b>	80
<b>IP class</b>	20
<b>Nominal voltage</b>	220 – 240 V
<b>Colour</b>	WH-RAL9016
<b>UGR</b>	16,2
<b>Glare control</b>	✓

