


**ART.: 8629461786338**

SL629 PL CM PRISM D/I

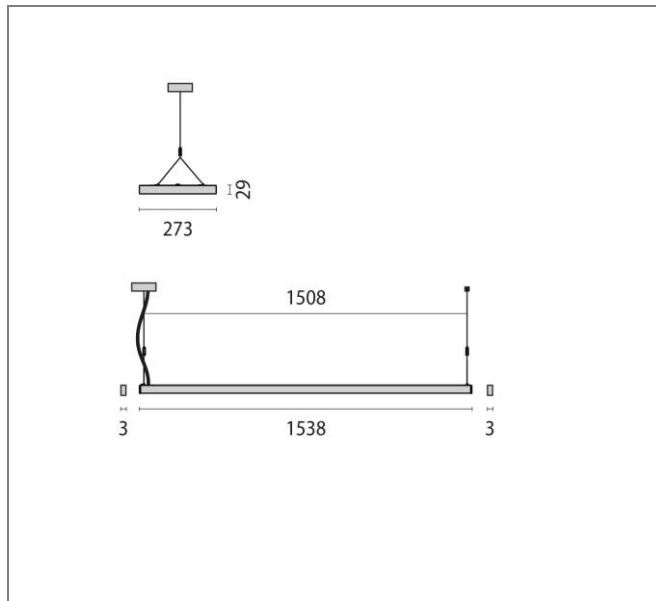

Art.: 8629461786338, SL629PL LB, Micro-prism, 69W, 3000K, Driver dali, 1538mm, Symmetrical - Direct / indirect, Grey, Suspended luminaire systems, consisting of one or more luminaire-modules and individually selectable components. Housing made of steel sheet, powder-coated / Connecting elements and end pieces made of die-cast aluminium, powder-coated / Prismatic cover for efficient light diffusion, glare reduction and a high level of uniformity / Light distribution direct or direct/ indirect / Colour rendering index Ra > 80 / Colour tolerance according to MacAdam = 3 SDCM / Dimmable via TouchDIM® / VDU application suitable acc. to EN 12464-1 / Special colour versions available upon request / Please have a look for the components at the list of accessories

|                               |             |
|-------------------------------|-------------|
| <b>Connected load</b>         | 69 W        |
| <b>Luminous flux</b>          | 8160 lm     |
| <b>Efficiency</b>             | 118 lm/W    |
| <b>Colour temperature</b>     | 3000K       |
| <b>Colour rendering (CRI)</b> | 80          |
| <b>IP class</b>               | 20          |
| <b>Nominal voltage</b>        | 220 – 240 V |
| <b>Colour</b>                 | GR-RAL9006  |
| <b>UGR</b>                    | 11,3        |
| <b>Glare control</b>          | ✓           |

