


**ART.: 8629461786430**

SL629 PL PRISM D/I

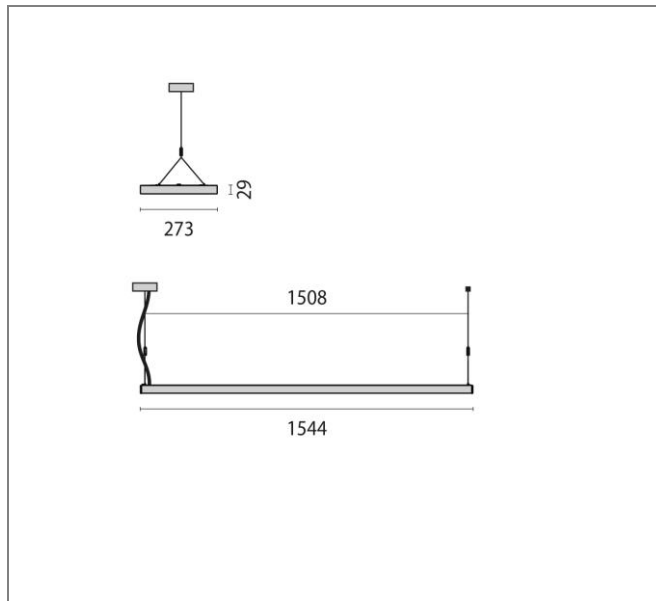

Art.: 8629461786430, SL629 PL, Prismenstruktur, 69W, 4000K, Driver dali, 1544mm, Symmetrical - Direct / indirect, Grey, LED suspended luminaire for interior, comprising: Housing made of steel sheet, die-cast aluminium end caps, powder painted / Prismatic cover for efficient light diffusion, glare reduction and a high level of uniformity / Direct / indirect light distribution / LED Sidelight-Technology for a homogenous light distribution over the entire area of the cover / Colour rendering index Ra > 80 / Colour tolerance according to MacAdam = 3 SDCM / Dimmable via TouchDIM® / Light engine can be replaced by means of a slide-in mechanism / Complete with steel suspension cable (1.5 m), transparent power cord and ceiling rose / DALI dimmable / VDU application suitable acc. to EN 12464-1 (see table) / Special colour versions available upon request

|                               |             |
|-------------------------------|-------------|
| <b>Connected load</b>         | 69 W        |
| <b>Luminous flux</b>          | 8410 lm     |
| <b>Efficiency</b>             | 121 lm/W    |
| <b>Colour temperature</b>     | 4000K       |
| <b>Colour rendering (CRI)</b> | 80          |
| <b>IP class</b>               | 20          |
| <b>Nominal voltage</b>        | 220 – 240 V |
| <b>Colour</b>                 | GR-RAL9006  |
| <b>UGR</b>                    | 11,3        |
| <b>Glare control</b>          | ✓           |

