


ART.: 8720761108910

SL720SL XL LED MICROPRISMA

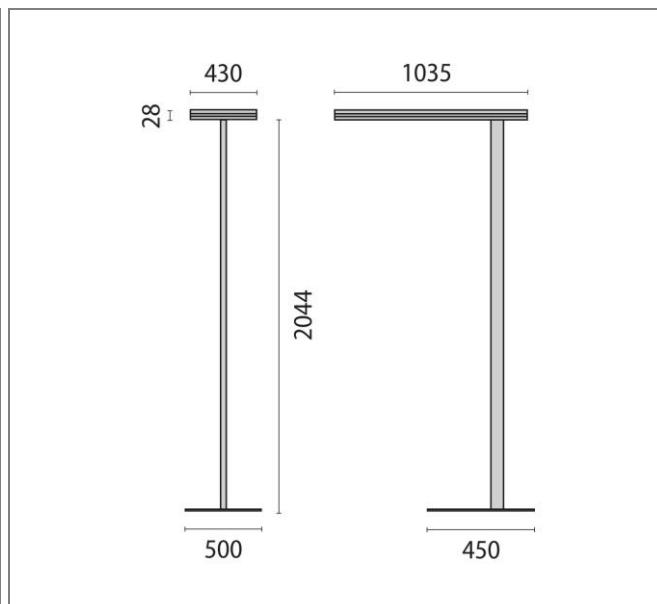

Art.: 8720761108910, SL720SL XL LED, Micro-prisma, 118W, 2700K - 6200K (HCL), Sensor, 1035mm, Symmetrical - Direct / indirect, White, LED free-standing luminaire for interior, including: Steel sheet head, extruded aluminium profile post, steel sheet base, powder painted / Angle of the lamp head adjustable using a set screw / Microprismatic diffuser for efficient light diffusion, glare reduction and a high uniformity / Direct / indirect light distribution / Suitable for simultaneous lighting of 2 workstations / Colour rendering index Ra > 80 / Colour tolerance according to MacAdam = 3 SDCM / Direct share of light dimmable; colour temperature 4000K / Complete with flexible power cord with plug / VDU application suitable acc. to EN 12464-1 / Sensor device available with task oriented PIR detector and daylight control / Light colour and brightness of indirect light share manually adjustable via Tunable White control / Light colour and brightness of indirect light share automatically adjustable via HCL (Human Centric Lighting) for wholesome and performance-enhancing management of the biorhythm / 3000 K colour temperature version on demand / Special colour versions available upon request

Connected load	118 W
Luminous flux	14300 lm
Efficiency	109 lm/W
Colour temperature	2700K - 6200K (HCL)
Colour rendering (CRI)	80
IP class	20
Nominal voltage	220 – 240 V
Colour	WH-RAL9016
UGR	0,0
Glare control	✓

