


**ART.: 8720761108930**

SL720SL XL LED MICROPRISMA

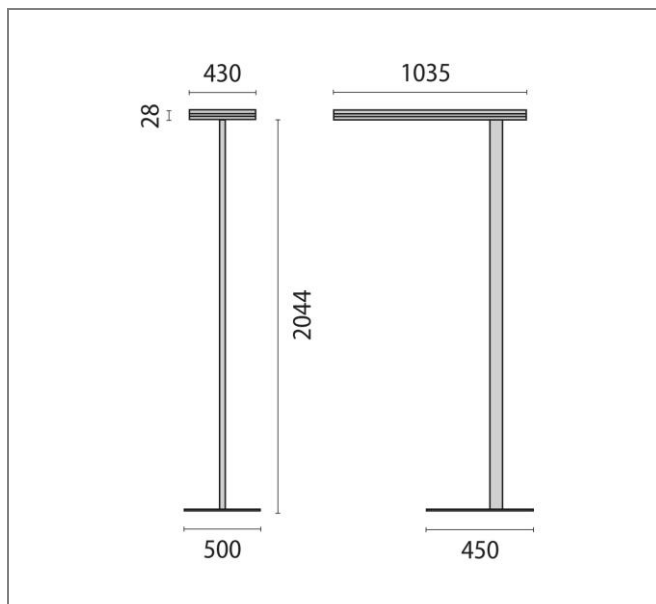

Art.: 8720761108930, SL720SL XL LED, Micro-prism, 118W, 2700K - 6200K (HCL), Sensor, 1035mm, Symmetrical - Direct / indirect, Grey, LED free-standing luminaire for interior, including: Steel sheet head, extruded aluminium profile post, steel sheet base, powder painted / Angle of the lamp head adjustable using a set screw / Microprismatic diffuser for efficient light diffusion, glare reduction and a high uniformity / Direct / indirect light distribution / Suitable for simultaneous lighting of 2 workstations / Colour rendering index Ra > 80 / Colour tolerance according to MacAdam = 3 SDCM / Direct share of light dimmable; colour temperature 4000K / Complete with flexible power cord with plug / VDU application suitable acc. to EN 12464-1 / Sensor device available with task oriented PIR detector and daylight control / Light colour and brightness of indirect light share manually adjustable via Tunable White control / Light colour and brightness of indirect light share automatically adjustable via HCL (Human Centric Lighting) for wholesome and performance-enhancing management of the biorhythm / 3000 K colour temperature version on demand / Special colour versions available upon request

<b>Connected load</b>	118 W
<b>Luminous flux</b>	14300 lm
<b>Efficiency</b>	121 lm/W
<b>Colour temperature</b>	2700K - 6200K (HCL)
<b>Colour rendering (CRI)</b>	80
<b>IP class</b>	20
<b>Nominal voltage</b>	220 – 240 V
<b>Colour</b>	GR-RAL9006
<b>UGR</b>	5,0
<b>Glare control</b>	✓

