


**ART.: 8720761115430**

SL720SL L LED MICROPRISMA

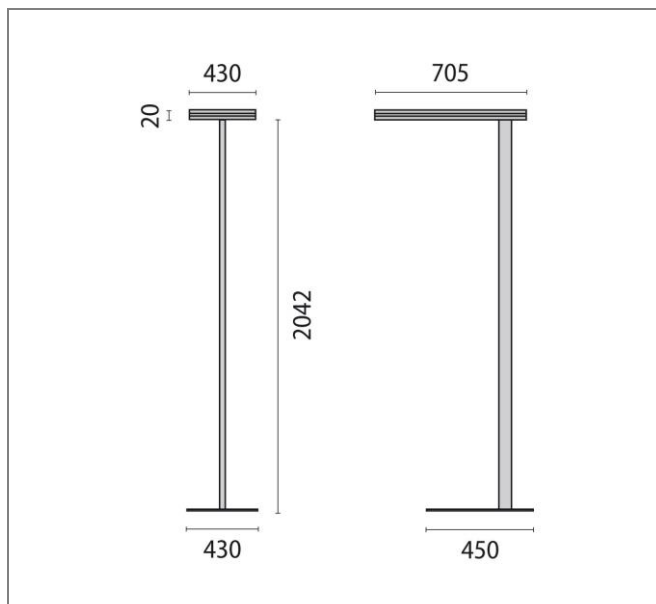

Art.: 8720761115430, SL720SL L LED, Micro-prism, 114W, 4000K, Driver dali, 705mm, Direct / indirect, Grey, LED free-standing luminaire for interior, including: Steel sheet head, extruded aluminium profile post, steel sheet base, powder painted, Micro-prismatic diffuser for efficient light diffusion, glare reduction and a high uniformity, Direct / indirect light distribution, Colour rendering index  $R_a > 80$ , Colour tolerance according to MacAdam  $\leq 3$  SDCM Direct share of light dimmable; colour temperature 4000K, Complete with flexible power cord with plug, VDU application suitable acc. to EN 12464-1, Sensor device available with task oriented PIRdetector and daylight control, Light colour and brightness of indirect light share manually adjustable via Tunable White control, Light colour and brightness of indirect light share automatically adjustable via HCL (Human Centric Lighting) for wholesome and performance-enhancing management of the biorhythm, 3000 K colour temperature version on demand, Special colour versions available upon request

<b>Connected load</b>	242 W
<b>Luminous flux</b>	13660 lm
<b>Efficiency</b>	120 lm/W
<b>Colour temperature</b>	4000K
<b>Colour rendering (CRI)</b>	80
<b>IP class</b>	20
<b>Nominal voltage</b>	220 – 240 V
<b>Colour</b>	RAL 9006
<b>Glare control</b>	✓

