


ART.: 8720761215410

SL720SL XL D+ LED MICROPRISMA

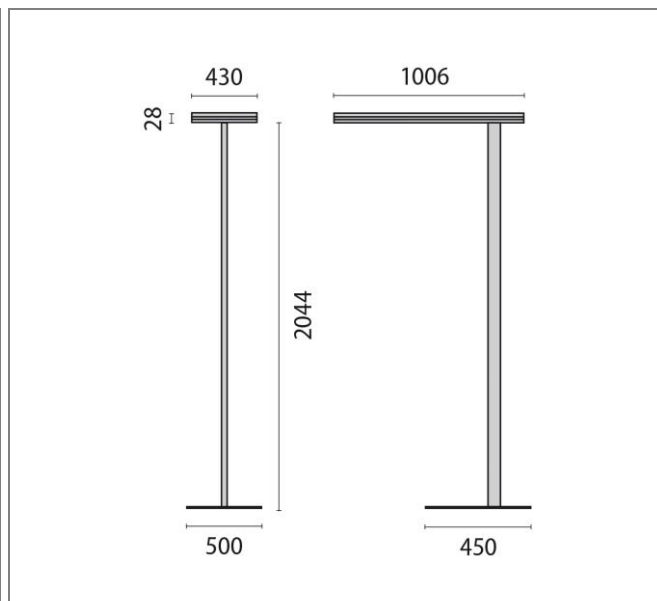

Art.: 8720761215410, SL720SL XL LED, Micro-prism, 212W, 4000K, Driver dali, 1006mm, Symmetrical - Direct / indirect, White, LED free-standing luminaire for interior, including: Steel sheet head, extruded aluminium profile post, steel sheet base, powder painted / Angle of the lamp head adjustable using a set screw / Practical U-shaped base enables luminaire to be positioned flexibly and flush to a writing desk / Micro-prismatic diffuser for efficient light diffusion, glare reduction and a high uniformity / Direct / indirect light distribution / Colour rendering index $R_a > 80$ / Colour tolerance according to MacAdam ≤ 3 SDCM / Direct share of light dimmable; colour temperature 4000K / Direct and indirect portions simultaneously dimmable (versions in 4000 K with sensor) / Complete with flexible power cord with plug / VDU application suitable acc. to EN 12464-1 / Sensor device available with task oriented PIR detector and daylight control / Light colour and brightness of indirect light share manually adjustable via Tunable White control / Light colour and brightness of indirect light share automatically adjustable via HCL (Human Centric Lighting) for wholesome and performance-enhancing management of the biorhythm / 3000 K colour temperature version on demand / The XL version is suitable for simultaneous illumination of two workplaces / D+ version: The direct light section is increased, dimmable, with colour temperature 4000K / The TWIN version is suitable for simultaneous illumination of two workplaces / TWIN version: switchable/dimmable direct and indirect light section / TWIN version: individual lighting control system for individual luminaires available on request / Special colour versions available upon request / For the innovative lighting technology of these lights patent is applied for (No. 10201511701.2)

| | |
|-------------------------------|-------------|
| Connected load | 212 W |
| Luminous flux | 23520 lm |
| Efficiency | 111 lm/W |
| Colour temperature | 4000K |
| Colour rendering (CRI) | 80 |
| IP class | 20 |
| Nominal voltage | 220 – 240 V |
| Colour | WH-RAL9016 |
| UGR | 10,6 |
| Glare control | ✓ |

