


ART.: 8720761745430

SL720SL L ECO LED MICROPRISMA

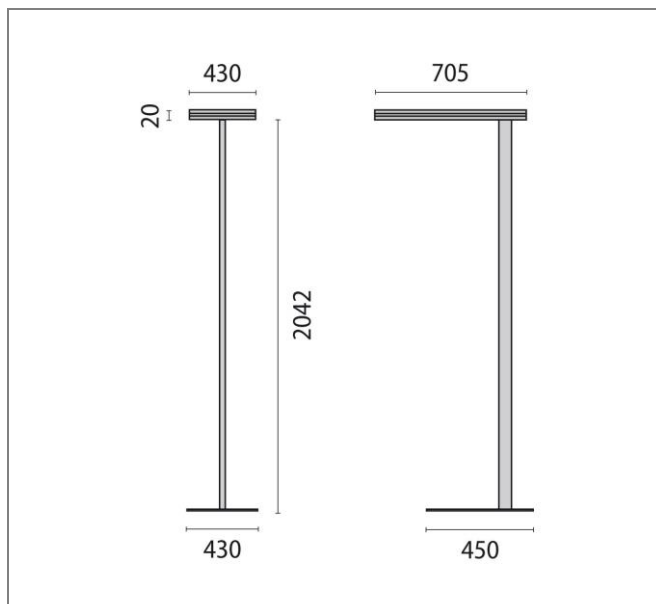

Art.: 8720761745430, SL720SL L ECO LED, Micro-prism, 82W, 4000K, Driver dali, 705mm, Direct / indirect, Grey, LED free-standing luminaire for interior, including: Steel sheet head, extruded aluminium profile post, steel sheet base, powder painted, Micro-prismatic diffuser for efficient light diffusion, glare reduction and a high uniformity, Direct / indirect light distribution, Colour rendering index Ra > 80, Colour tolerance according to MacAdam ≤ 3 SDCM Complete with flexible power cord with plug, VDU application suitable acc. to EN 12464-1, Sensor device available with task oriented PIRdetector and daylight control, 3000 K colour temperature version on demand, Special colour versions available upon request

Connected load	242 W
Luminous flux	8940 lm
Efficiency	109 lm/W
Colour temperature	4000K
Colour rendering (CRI)	80
IP class	20
Nominal voltage	220 – 240 V
Colour	RAL 9006
UGR	12,4
Glare control	✓

