


ART.: 8720761778930

SL720SL L LED microprisma

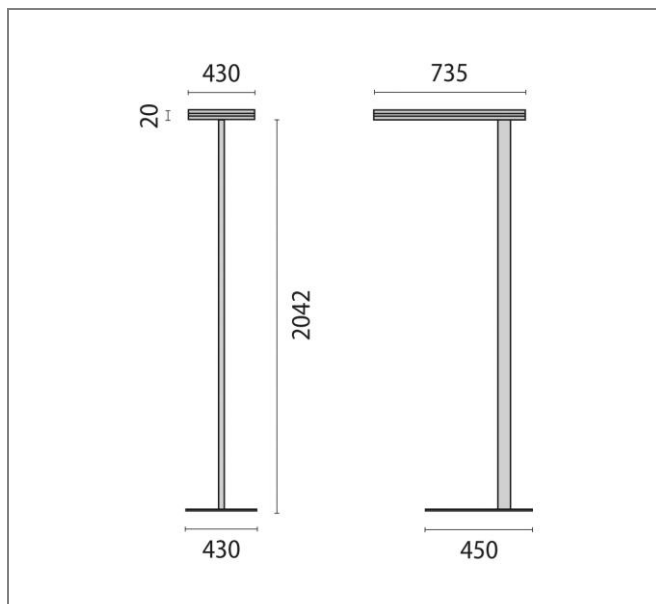

Art.: 8720761778930, LED-Free standing luminaire 2700-6200K 85W HCL light sensor micro-prism d+i, LED free-standing luminaire for interior, including: Steel sheet head, extruded aluminium profile post, steel sheet base, powder painted / Angle of the lamp head adjustable using a set screw / Microprismatic diffuser for efficient light diffusion, glare reduction and a high uniformity / Direct / indirect light distribution / Colour rendering index Ra > 80 / Colour tolerance according to MacAdam = 3 SDCM / Direct share of light dimmable, colour temperature 4000K / Complete with flexible power cord with plug / VDU application suitable acc. to EN 12464-1 / Sensor device available with task oriented PIR detector and daylight control / Light colour and brightness of indirect light share manually adjustable via Tunable White control / Light colour and brightness of indirect light share automatically adjustable via HCL (Human Centric Lighting) for wholesome and performance-enhancing management of the biorhythm / 3000 K colour temperature version on demand / Special colour versions available upon request

Connected load	85 W
Luminous flux	10120 lm
Efficiency	119 lm/W
Colour temperature	2700 - 6200K
Colour rendering (CRI)	80
IP class	20
Nominal voltage	220 – 240 V
Colour	GR-RAL9006
UGR	6,2
Glare control	✓

