


ART.: 8720762708430

SL720SL L TWIN LED MICROPRISMATIC COVER

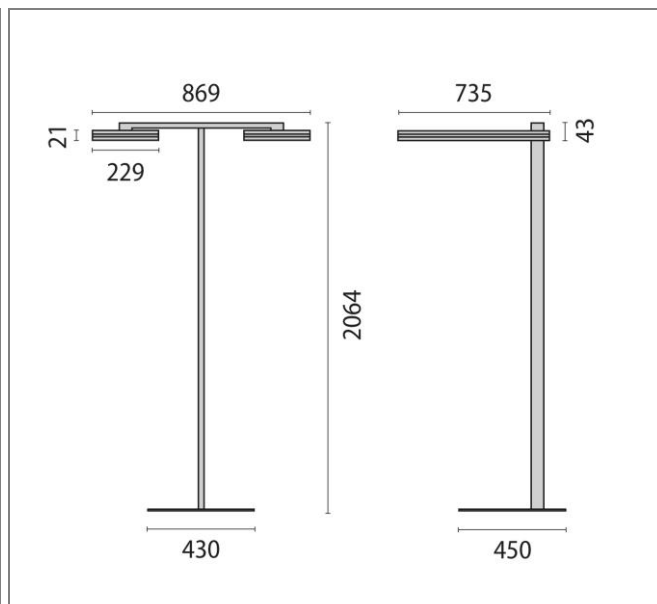

Art.: 8720762708430, SL720 SL, Micro-prism, 140W, 4000K, Sensor, 735mm, Symmetrical - Direct / indirect, Grey, LED dual-head free-standing luminaire for indoor areas, consisting of: Luminaire heads and pole made of extruded aluminium profile, sheet steel base, powder-coated / Angle of the lamp head adjustable using a set screw / The functional U-foot allows flexible placing under the desk / Microprismatic diffuser for efficient light diffusion, glare reduction and a high uniformity / Direct / indirect light distribution / Suitable for simultaneous lighting of 2 workstations / Colour rendering index Ra > 80 / Colour tolerance according to MacAdam = 3 SDCM / Dimmable via TouchDIM® / Complete with flexible power cord with plug / VDU application suitable acc. to EN 12464-1 / Sensor device available with task oriented PIR detector and daylight control / 3000 K colour temperature version on demand / Special colour versions available upon request / For the innovative lighting technology of these lights patent is applied for (No. 10201511701.2)

Connected load	140 W
Luminous flux	15010 lm
Efficiency	107 lm/W
Colour temperature	4000K
Colour rendering (CRI)	80
IP class	20
Nominal voltage	220 – 240 V
Colour	GR-RAL9006
UGR	10,3
Glare control	✓

