


**ART.: 8807211326382**

MERCURY PL M BLACK TR

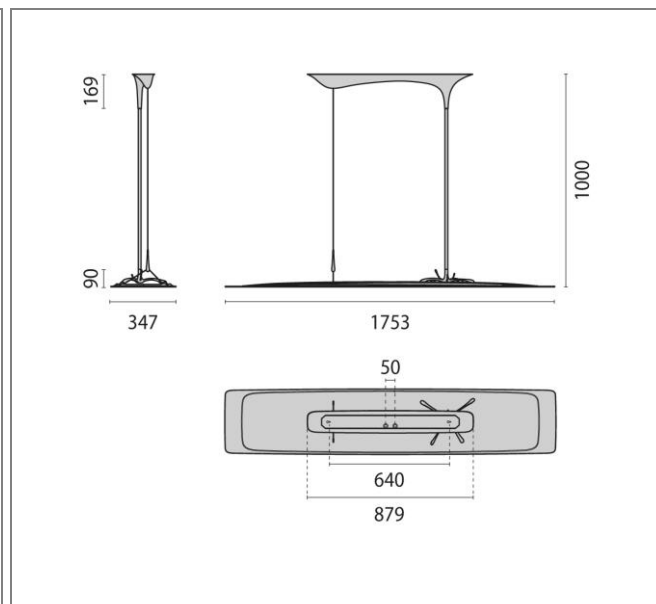

Art.: 8807211326382, MERCURY, Micro-prism, 34W, 3000K, Driver dali, 1753mm, Symmetrical - direct, Black, LED suspended luminaire for interior, comprising: Luminaire head made from glass with moulded designer cover in a wave shape and canopy made from moulded plastic in a drip shape. / Pendant tube made from metal and cable suspension on one side / Flowing forms create a dynamically vibrant sculptural effect that remains suspended in time. / The fitting is available with different light optics: Light optics made from highly transparent, lustrous glass with a white ceramic edge (WHITE TR) and integrated micro prism for efficient light diffusion, glare minimisation, and excellent uniformity / Light optics made from highly transparent, lustrous glass with a black ceramic edge (BLACK TR) and integrated micro prism for efficient light diffusion, glare minimisation, and excellent uniformity / Light optics made from partially mirrored, lustrous black glass with a black ceramic edge (BLACK DRK) and integrated micro prism for efficient light diffusion, glare minimisation, and excellent uniformity / Direct light distribution / LED Sidelight-Technology for a homogenous light distribution over the entire area of the cover / Colour rendering index Ra > 80 / Colour tolerance according to MacAdam ≤ 3 SDCM / Dimmable via TouchDIM® / VDU application suitable acc. to EN 12464-1 / Sensor device available with task oriented PIR detector and daylight control / Special colour versions available upon request / Including pendant tube and cable suspension, supply line and ceiling canopy

|                               |             |
|-------------------------------|-------------|
| <b>Connected load</b>         | 34 W        |
| <b>Luminous flux</b>          | 3600 lm     |
| <b>Efficiency</b>             | 106 lm/W    |
| <b>Colour temperature</b>     | 3000K       |
| <b>Colour rendering (CRI)</b> | 80          |
| <b>IP class</b>               | 20          |
| <b>Nominal voltage</b>        | 220 – 240 V |
| <b>Colour</b>                 | BK-RAL9005  |
| <b>UGR</b>                    | 17,1        |
| <b>Glare control</b>          | ✓           |

