


**ART.: 8808421943382**

IN-TENSE PL M BLACK DRK

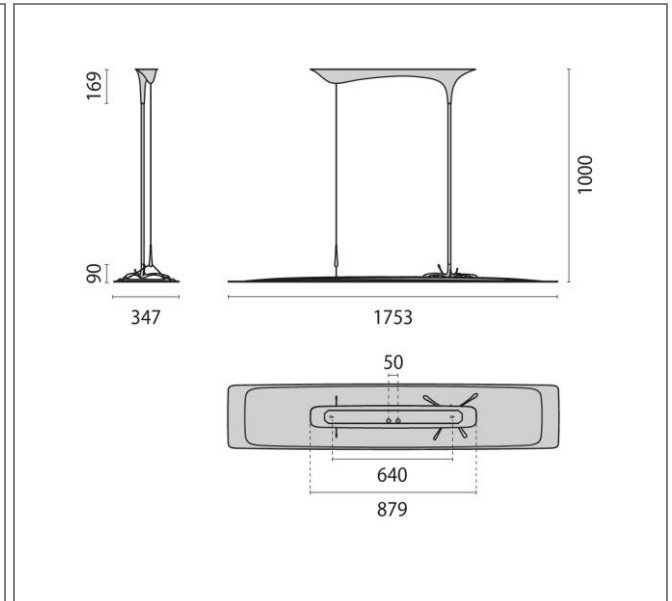

Art.: 8808421943382, IN-TENSE, Micro-prism, 95W, 3000K, Driver static, 1753mm, Symmetrical - Direct / indirect, Black, LED suspended luminaire for interior, comprising: Luminaire head made from glass with moulded design cover in a wave shape and drip applications made from metal, as well as a diecast canopy / Pendant tube made from metal and cable suspension on one side, with drip application / Flowing forms create a dynamically vibrant sculptural effect that remains suspended in time. / The fitting is available with different light optics: Light optics made from highly transparent, lustrous glass with a white ceramic edge (WHITE TR) and integrated micro prism for efficient light diffusion, glare minimisation, and excellent uniformity / Light optics made from highly transparent, lustrous glass with a black ceramic edge (BLACK TR) and integrated micro prism for efficient light diffusion, glare minimisation, and excellent uniformity / Light optics made from partially mirrored, lustrous black glass with a black ceramic edge (BLACK DRK) and integrated micro prism for efficient light diffusion, glare minimisation, and excellent uniformity / Direct/indirect-beam light distribution for an improved room atmosphere and increased visual comfort / LED Sidelight-Technology for a homogenous light distribution over the entire area of the cover / Colour rendering index Ra > 80 / Colour tolerance according to MacAdam ≤ 3 SDCM / Dimmable via TouchDIM® / VDU application suitable acc. to EN 12464-1 / Sensor device available with task oriented PIR detector and daylight control / Special colour versions available upon request / Including pendant tube and cable suspension, supply line and ceiling canopy

<b>Connected load</b>	95 W
<b>Luminous flux</b>	6710 lm
<b>Efficiency</b>	70 lm/W
<b>Colour temperature</b>	3000K
<b>Colour rendering (CRI)</b>	80
<b>IP class</b>	20
<b>Nominal voltage</b>	220 – 240 V
<b>Colour</b>	BK-RAL9005
<b>UGR</b>	0,0
<b>Glare control</b>	✓

