


MINIMAL TRACK 24V Profile 2m

A384-02-00- | N | WT |



MINIMAL TRACK 24V Rubber Cable n x 1m

A384-00-01- | N |


n = Total Length of System.

24V | Max. 4A | III

MINIMAL TRACK 24V Corner 90° 1 Plane

A384-00-02- | N | WT |


Cable Length = 35mm.



MINIMAL TRACK 24V Corner 90° 1 Plane Rounded

A384-00-03- | N | WT |


Cable Length = 35mm.



MINIMAL TRACK 24V Corner 90° 2 Planes

A384-00-04- | N | WT |

Cable Length = 100mm.




MINIMAL TRACK 24V End Cap

A384-00-05- | N | WT |






MINIMAL TRACK 24V Connection Box

A384-00-06- | N | WT |





					P	V	D [A x B x C]
MINIMAL TRACK 24V Power Supply Box	ON/OFF	A384-00-07- NT WT	40W	24V	280 x 30 x 24mm		
		A384-00-08- NT WT	100W	24V	280 x 30 x 24mm		
220 240	V~	Included ON/OFF 24Vdc Power Supply.					
MINIMAL TRACK 24V Remote Power Supply	ON/OFF	0434-01-37	60W	24V	180 x 52 x 30mm		
		0433-10-22	100W	24V	295 x 43 x 30mm		
220 240	V~						
MINIMAL TRACK 24V Remote Constant Voltage Dimmer		0433-01-32	DALI / Push	24V	181 x 42 x 20mm		
		0433-01-35	CASAMBI	24V	72,6 x 30 x 18mm		
		0434-01-64	WIFI	24V	105 x 44 x 23mm		
24 V							



DROP VOLTAGE TABLE

		CABLE LENGTH (m)			
		<5	<10	<20	<30
POWER [W]	CABLE SECTION [mm²]	TRACK LENGTH (m)			
		30	30	30	30
40	0,75	30	30	30	30
	1,5	30	30	30	30
60	0,75	30	30	20	10
	1,5	30	30	30	20
100	0,75	20	10	X	X
	1,5	20	20	10	X

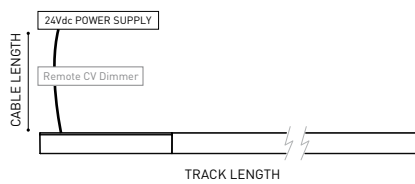

COLOUR | N ■ | NT ■ | WT □ |

DIM OPTIONS PLEASE CONSULT



Calle N · Pol. Ind. EL OLIVERAL
46394 Ribarroja del Turia · Valencia (Spain)
Tel. +34 961 667 207 · Fax +34 961 667 054
info@arkoslight.com · www.arkoslight.com

INSTALLATION GUIDE
<https://youtu.be/KnedJbKp7oo>



MINIMAL TRACK SUSPENSION

ARKOSLIGHT



MINIMAL TRACK 24V Suspension

Profile 2m

A384-02-00- | N | WT |

Profile 2m Initial feed kit

A400-02-10- | N | WT |

Profile 2m Middle feed kit*


A400-02-20- | N | WT |

* Unidirectional Middle Feed.

MINIMAL TRACK 24V Suspension Corner 90°

A400-00-03- | N | WT |

Cable Length = 85mm.



MINIMAL TRACK 24V Suspension

Rubber Cable n x 1m

A400-00-01- | N |

n = Total Length of System.

MINIMAL TRACK 24V Suspension Straight Joiner

A400-00-02- | N | WT |

MINIMAL TRACK 24V Suspension Kit

A400-02-04- | N | WT |


Max distance between suspension kits = 100 cm.

MINIMAL TRACK 24V Suspension End Caps

A400-00-05- | N | WT |


Two End Caps Included.

24 V | Max. 4A





			P	V	D (A x B x C)
MINIMAL TRACK 24V Suspension Power Supply Box	ON/OFF	A400-00-06- NT WT	40W	24V	280 x 30 x 36mm
		A400-00-07- NT WT	100W	24V	280 x 30 x 36mm
220 240 V~ Included ON/OFF 24Vdc Power Supply.					
MINIMAL TRACK 24V Remote Power Supply	ON/OFF	0434-01-37	60W	24V	180 x 52 x 30mm
		0433-10-22	100W	24V	295 x 43 x 30mm
220 240 V~					
MINIMAL TRACK 24V Remote Constant Voltage Dimmer		0433-01-32	DALI / Push	24V	181 x 42 x 20mm
		0433-01-35	CASAMBI	24V	72,6 x 30 x 18mm
		0434-01-64	WIFI	24V	105 x 44 x 23mm

24V

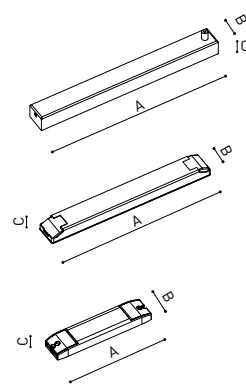

DROP VOLTAGE TABLE

		CABLE LENGTH (m)			
		<5	<10	<20	<30
POWER (W)	CABLE SECTION (mm²)	TRACK LENGTH (m)			
		<5	<10	<20	<30
40	0,75	30	30	30	30
	1,5	30	30	30	30
60	0,75	30	30	20	10
	1,5	30	30	30	20
100	0,75	20	10	X	X
	1,5	20	20	10	X

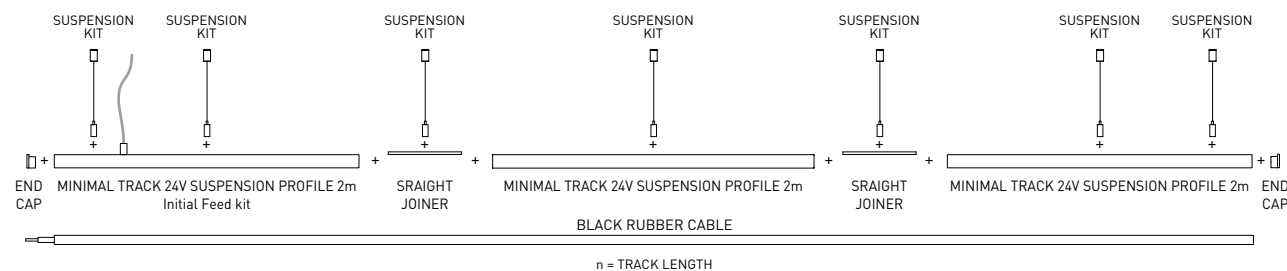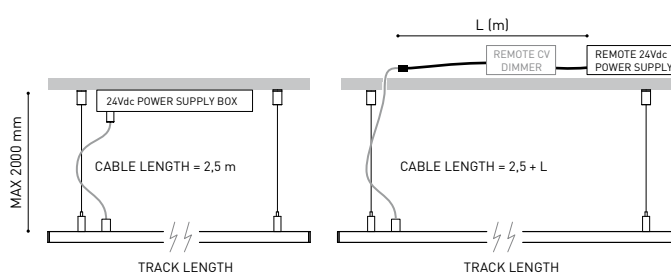

COLOUR | N ■ | NT ■ | WT □ |


DIM OPTIONS PLEASE CONSULT

Calle N · Pol. Ind. EL OLIVERAL
46394 Ribarroja del Turia · Valencia (Spain)
Tel. +34 961 667 207 · Fax +34 961 667 054
info@arkoslight.com · www.arkoslight.com

5Year
GUARANTEE

MINIMAL TRACK TRIMLESS


ARKOSLIGHT



MINIMAL TRACK 24V Trimless

Profile 2m

A467-02-00- | N |



MINIMAL TRACK 24V Trimless

Rubber Cable n x 1m

A467-00-01- | N |

n = Total Length of System.


24V | Max. 4A

MINIMAL TRACK 24V Trimless

Corner 90° 1 Plane

A467-00-02- | N |

Cable Length = 140mm.



MINIMAL TRACK 24V Trimless

Corner 90° 1 Plane Connector

A467-00-03- | N |




MINIMAL TRACK 24V Trimless

Corner 90° 2 Planes

A467-00-04- | N |

Cable Length = 200mm.



MINIMAL TRACK 24V Trimless

End Caps

A467-00-05- | N |

Two End Caps Included



MINIMAL TRACK 24V Trimless

Straight Joiner


A467-00-06



MINIMAL TRACK 24V Trimless

Connection Box

A467-00-07- | N |



MINIMAL TRACK 24V Remote Power Supply

ON/OFF

0434-01-37

P

V

D (A x B x C)

60W

24V

180 x 52 x 30mm

0433-10-22

100W

24V

295 x 43 x 30mm

220
240 V~

MINIMAL TRACK 24V Remote Constant Voltage Dimmer



0433-01-32

DALI / Push

24V

181 x 42 x 20mm

0433-01-35

CASAMBI

24V

72,6 x 30 x 18mm



0434-01-64

WIFI

24V

105 x 44 x 23mm



24V



DROP VOLTAGE TABLE

POWER [W]	CABLE SECTION [mm²]	CABLE LENGTH [m]				TRACK LENGTH [m]
		<5	<10	<20	<30	
60	0,75	30	30	20	10	
	1,5	30	30	30	20	
100	0,75	20	10	X	X	
	1,5	20	20	10	X	

Reduce 5 meters per each 'Corner 90° 1 Plane CONNECTOR' used.

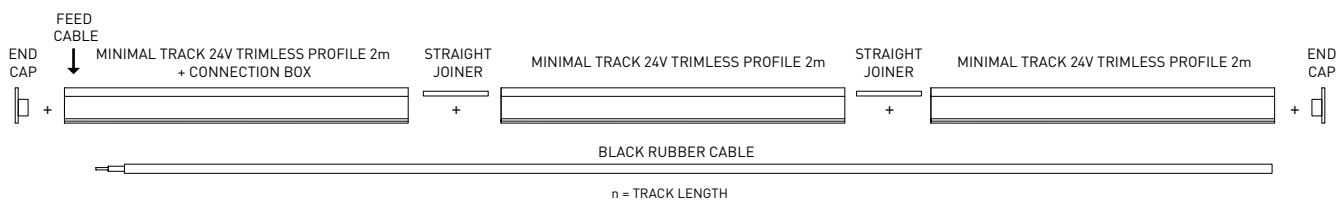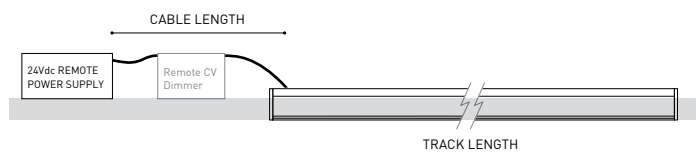

COLOUR | N ■ |

DIM OPTIONS PLEASE CONSULT

Calle N · Pol. Ind. EL OLIVERAL
46394 Ribarroja del Turia · Valencia (Spain)
Tel. +34 961 667 207 · Fax +34 961 667 054
info@arkoslight.com · www.arkoslight.com

INSTALLATION GUIDE
<https://youtu.be/KnedJbKp7oo>



5Year
GUARANTEE