

ACCESSOIRES ACIER GALVANISÉ

Tés Equerres 45° - TE 45°




Description

- Té
- Orientation 45°

Dimensions


- TE $\varnothing A - \varnothing B / 45^\circ$
- Mâle / Mâle / Mâle



Référence	Code	$\varnothing A$ (mm)	$\varnothing B$ (mm)
TE 80/80/45°	864 771	80	80
TE 100/80/45°	864 772	100	80
TE 100/100/45°	864 438	100	100
TE 125/80/45°	864 775	125	80
TE 125/100/45°	864 774	125	100
TE 125/125/45°	864 773	125	125
TE 160/80/45°	864 779	160	80
TE 160/100/45°	864 778	160	100
TE 160/125/45°	864 777	160	125
TE 160/160/45°	864 776	160	160
TE 200/80/45°	864 782	200	80
TE 200/100/45°	864 360	200	100
TE 200/125/45°	864 781	200	125
TE 200/160/45°	864 780	200	160
TE 200/200/45°	864 462	200	200
TE 250/125/45°	864 785	250	125
TE 250/160/45°	864 784	250	160
TE 250/200/45°	864 783	250	200
TE 250/250/45°	864 275	250	250
TE 315/125/45°	864 788	315	125
TE 315/160/45°	864 787	315	160
TE 315/200/45°	864 433	315	200
TE 315/250/45°	864 276	315	250
TE 315/315/45°	864 786	315	315
TE 355/125/45°	864 793	355	125
TE 355/160/45°	864 792	355	160
TE 355/200/45°	864 791	355	200
TE 355/250/45°	864 277	355	250
TE 355/315/45°	864 790	355	315
TE 355/355/45°	864 789	355	355
TE 400/125/45°	864 799	400	125
TE 400/160/45°	864 798	400	160
TE 400/200/45°	864 797	400	200
TE 400/250/45°	864 278	400	250
TE 400/315/45°	864 796	400	315
TE 400/355/45°	864 795	400	355

Référence	Code	$\varnothing A$ (mm)	$\varnothing B$ (mm)
TE 400/400/45°	864 794	400	400
TE 450/250/45°	864 279	450	250
TE 450/315/45°	864 803	450	315
TE 450/355/45°	864 802	450	355
TE 450/400/45°	864 801	450	400
TE 450/450/45°	864 800	450	450
TE 500/200/45°	864 809	500	200
TE 500/250/45°	864 280	500	250
TE 500/315/45°	864 808	500	315
TE 500/355/45°	864 807	500	355
TE 500/400/45°	864 806	500	400
TE 500/450/45°	864 805	500	450
TE 500/500/45°	864 804	500	500
TE 560/250/45°	864 816	560	250
TE 560/315/45°	864 815	560	315
TE 560/355/45°	864 814	560	355
TE 560/400/45°	864 813	560	400
TE 560/450/45°	864 812	560	450
TE 560/500/45°	864 811	560	500
TE 560/560/45°	864 810	560	560
TE 630/250/45°	864 824	630	250
TE 630/315/45°	864 823	630	315
TE 630/355/45°	864 822	630	355
TE 630/400/45°	864 821	630	400
TE 630/450/45°	864 820	630	450
TE 630/500/45°	864 819	630	500
TE 630/560/45°	864 818	630	560
TE 630/630/45°	864 817	630	630
TE 710/355/45°	864 831	710	355
TE 710/400/45°	864 830	710	400
TE 710/450/45°	864 829	710	450
TE 710/500/45°	864 828	710	500
TE 710/560/45°	864 827	710	560
TE 710/630/45°	864 826	710	630
TE 710/710/45°	864 825	710	710

Culottes 45° - CL 45°

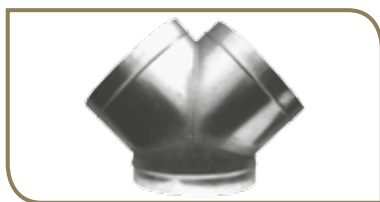


Description

- Culotte à 45° permettant de rajouter deux branches de réseaux
- Limite les pertes de charges

Dimensions

- CL $\varnothing A$
- Mâle / Mâle / Mâle



Référence	Code	$\varnothing A$ (mm)
CL 80/45°	864 447	80
CL 100/45°	865 233	100
CL 125/45°	865 234	125
CL 160/45°	864 408	160

Référence	Code	$\varnothing A$ (mm)
CL 200/45°	864 386	200
CL 250/45°	864 484	250
CL 315/45°	865 235	315