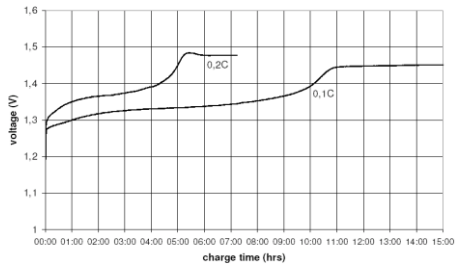
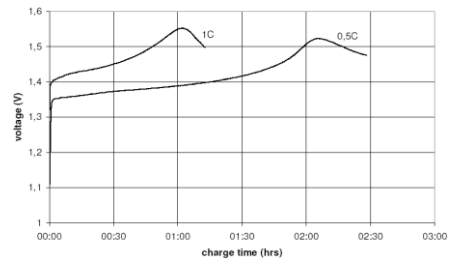



			Conditions	Diagrams
cell type:	NiMH			
cell size:	D			
nominal voltage:	1.2	V	at standard charge (0.1C / 20°C)	standard charge 
max. charge voltage:	1.5	V		
capacity				
nominal:	10000	mAh	discharge at 0.2C	fast charge 
minimum:	9300 8500	mAh mAh	discharge at 0.2C discharge at 1C	
			1.0V end discharge voltage ta: 20°C	
max. continuous discharge current:	10	A	ta: 0...45°C	
charge	current	time		
standard charge:	1000	mA	14...16hrs	
quick charge:	2750	mA	4hrs	
fast charge:	5000	mA	2.3hrs	
recommended charge	0...5	mV	- ΔV (-deltaV)	
termination control	0.8...1	°C	temperature rise per minute	
parameters:	45...50	°C	TCO (temperature cut off)	
trickle charge current:	50...350	mA	(recommended)	
continuous overcharge: (less than 1 year)	≤ 750	mA	no conspicuous deformation no leakage	
internal resistance: (impedance)	≤ 12	mΩ	at 1KHz battery fully charged	
life expectancy:	≥ 500	cycles	acc. IEC standard	
self discharge				
charge retention:	≥ 80	%	after 12 months storage at 20°C	
initial capacity:	≥ 6000	mAh	within 30 days after delivery discharge at 0.2C	
ambient temperature range:	0...45 °C 10...40 °C 0...45 °C - 20...65 °C - 20...50 °C - 20...40 °C - 20...30 °C		standard charge fast charge discharge (≥1C) discharge (<1C) storage (≤3months) storage (≤6months) storage (≤24months)	
QCT1:	20/9000/12			
QCT2:	30/8500/12			
mechanical specifications				
cell dimensions				
diameter d1:	32.8 - 1.0	mm		
diameter d2:	max. 9.5	mm		
height h1:	61.5 - 2.0	mm		
height h2:	min. 1.5	mm		
weight:	157 ± 8	g		
				
				75
	ANSMANN Specifications for model:		D - 10000mAh low self discharge bulk package	
	data sheet no. / part no.		5030641	
	supplier no.		702069	
	author / date		TG / 31.03.2016	