

MODEL: T-875 with Bayonet
VOLTAGE: 8
DIMENSIONS: Inches (mm)
BATTERY: Flooded/wet lead-acid battery
COLOR: Maroon (case/cover)
MATERIAL: Polypropylene
WATERING SYSTEM: HydroLink™ Watering System



PRODUCT SPECIFICATIONS

| BCI GROUP SIZE | TYPE | CAPACITY ^A Minutes | | CAPACITY ^B Amp-Hours (AH) | | | | ENERGY (kWh) | TERMINAL Type ^E | DIMENSIONS ^C Inches (mm) | | | WEIGHT lbs. (kg) |
|--|--------------|-------------------------------|----------|--------------------------------------|------------|------------|-------------|--------------|----------------------------|-------------------------------------|------------|-------------|------------------|
| | | @25 Amps | @56 Amps | 5-Hr Rate | 10-Hr Rate | 20-Hr Rate | 100-Hr Rate | | | 100-Hr Rate | Length | Width | |
| 8 VOLT DEEP CYCLE BATTERY - with T2 TECHNOLOGY™ | | | | | | | | | | | | | |
| GC8 | T-875 | 295 | 117 | 145 | 147 | 170 | 189 | 1.51 | 1, 2, 3 | 10.21 (259) | 7.06 (179) | 11.14 (283) | 63 (29) |

- A. The number of minutes a battery can deliver when discharged at a constant rate at 80°F (27°C) and maintain a voltage above 1.75 V/cell. Capacities are based on peak performance.
 B. The amount of amp-hours (AH) a battery can deliver when discharged at a constant rate at 80°F (27°C) and 86°F (30°C) for the 5-Hour rate and maintain a voltage above 1.75 V/cell. Capacities are based on peak performance.
 C. Dimensions are based on nominal size. Dimensions may vary depending on type of handle or terminal.
 D. Dimensions taken from bottom of the battery to the highest point on the battery. Heights may vary depending on type of terminal.
 E. Terminal images are representative only.
 Trojan's Battery testing procedures adhere to both BCI and IEC test standards.

CHARGING INSTRUCTIONS

CHARGER VOLTAGE SETTINGS (AT 77°F/25°C)

| System Voltage | 8V | 24V | 48V |
|----------------|-------|------|------|
| Daily Charge | 9.87 | 29.6 | 59.2 |
| Float | 8.80 | 26.4 | 52.8 |
| Equalize | 10.33 | 31.0 | 62.0 |

Do not install or charge batteries in a sealed or non-ventilated compartment. Constant under or overcharging will damage the battery and shorten its life as with any battery.

CHARGING TEMPERATURE COMPENSATION

.028 VPC for every 10°F (5.55°C) above or below 77°F (25°C) (add .028 VPC for every 10°F (5.55°C) below 77°F and subtract .028 VPC for every 10°C above 77°F).


OPERATIONAL DATA

| Operating Temperature | Self Discharge |
|---|--|
| -4°F to 113°F (-20°C to +45°C). At temperatures below 32°F (0°C) maintain a state of charge greater than 60%. | 5 – 15% per month depending on storage temperature conditions. |


TERMINAL CONFIGURATIONS

| | | | |
|---|------|-----------------------------------|---|
| 1 | ELPT | Embedded Low Profile Terminal |  <p><i>Terminal Height Inches (mm)</i> 1.22 (31) <i>Torque Values in-lb (Nm)</i> 95 – 105 (11 - 12) <i>Bolt Size</i> 5/16"</p> |
| 2 | EHPT | Embedded High Profile Terminal |  <p><i>Terminal Height Inches (mm)</i> 1.50 (38) <i>Torque Values in-lb (Nm)</i> 95 – 105 (11 - 12) <i>Bolt Size</i> 5/16"</p> |
| 3 | EAPT | Embedded Automotive Post Terminal |  <p><i>Terminal Height Inches (mm)</i> .95 (24) <i>Torque Values in-lb (Nm)</i> 50 – 70 (5.6 - 7.9)</p> |


BATTERY DIMENSIONS (shown with EHPT)

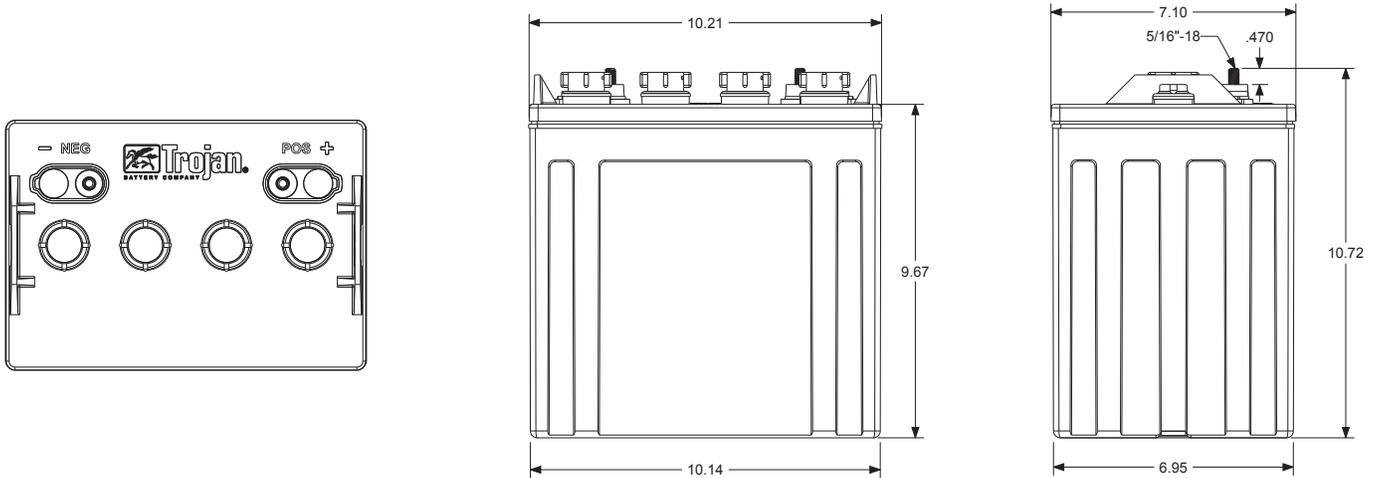

TROJAN T-875 PERFORMANCE

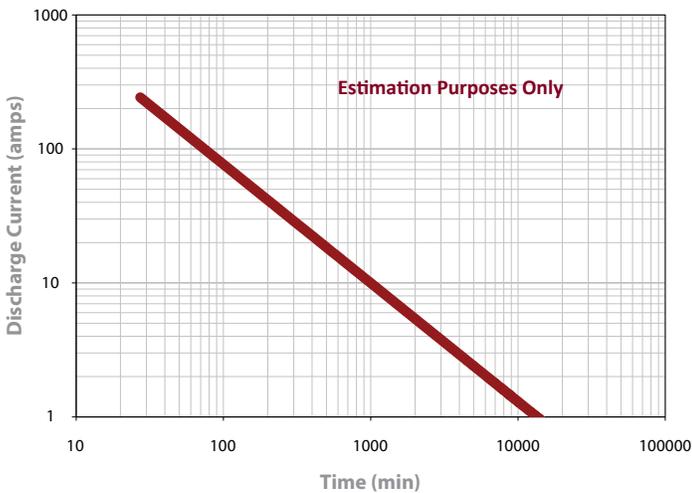

PERCENT CAPACITY VS. TEMPERATURE

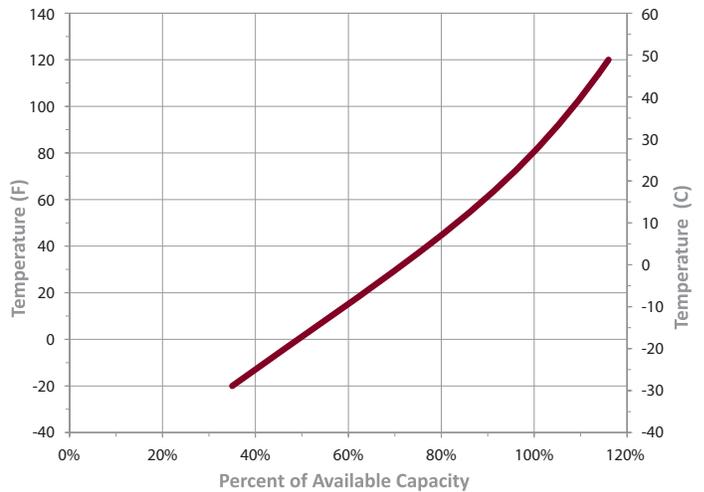

Trojan batteries are available worldwide through Trojan's Master Distributor Network. We offer outstanding technical support, provided by full-time application engineers.

For a Trojan Master Distributor near you, call 800.423.6569 or + 1.562.236.3000 or visit www.trojanbattery.com

12380 Clark Street, Santa Fe Springs, CA 90670 • USA