



# CBHF1-SM

Main features:


Compact & lightweight

Power from 48W up to 290W

Current from 4A to 12A

## APPLICATIONS



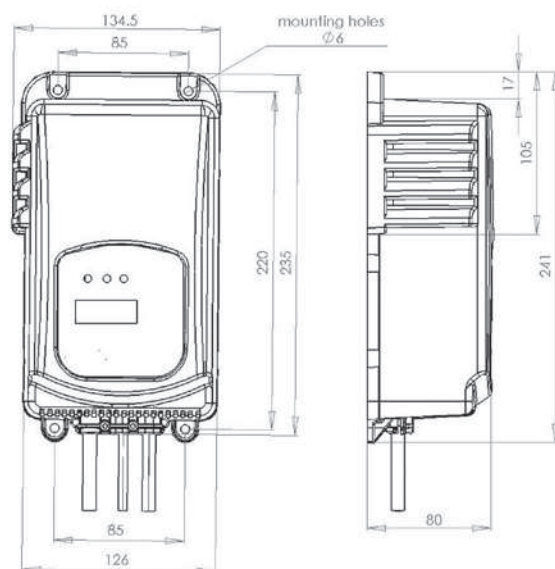

DIMENSIONS (LxWxH): 134,5x241x80 mm – 5.30x9.49x3.15 in

WEIGHT: 1,80 Kg – 3.97 lbs

PROTECTION GRADE IP30

INPUT VOLTAGE: 208 ÷ 240 Vac – 50-60 Hz

| Battery Voltage | Battery Range |              | Charging Current | Model |
|-----------------|---------------|--------------|------------------|-------|
|                 | 5h            | 20h          |                  |       |
| 12V             | 20 ÷ 40 Ah    | 30 ÷ 50 Ah   | 4A               | 12-4  |
|                 | 40 ÷ 80 Ah    | 60 ÷ 105 Ah  | 8A               | 12-8  |
|                 | 60 ÷ 100 Ah   | 70 ÷ 130 Ah  | 10A              | 12-10 |
|                 | 90 ÷ 120 Ah   | 120 ÷ 160 Ah | 12A              | 12-12 |
| 24V             | 20 ÷ 40 Ah    | 30 ÷ 50 Ah   | 4A               | 24-4  |
|                 | 40 ÷ 80 Ah    | 60 ÷ 105 Ah  | 8A               | 24-8  |
|                 | 60 ÷ 100 Ah   | 70 ÷ 130 Ah  | 10A              | 24-10 |
|                 | 90 ÷ 120 Ah   | 120 ÷ 160 Ah | 12A              | 24-12 |

