

SL-550iX

Size: 1/2AA

- Extended temperature range
- iXtra – long term high performance


Performance Data

(Typical values for batteries stored at +25 °C for one year)


System	LTC
Nominal voltage	3.6 V
Nominal capacity	0.9 Ah
Nominal current	0.6 mA
Max. continuous discharge current	50 mA
Pulse current capability	100 mA
Anode surface area	6 cm ²
Lithium content	0.35 g
Weight	9.6 g
Volume	4.3 cm ³
Temperature range	-55 °C ... +130 °C




SL-550iX/S

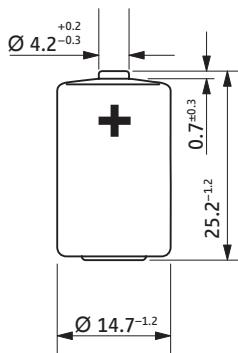


SL-550iX/T

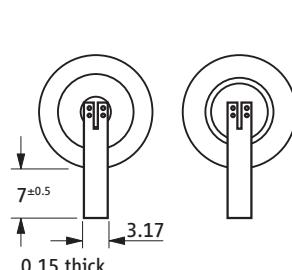


SL-550iX/P

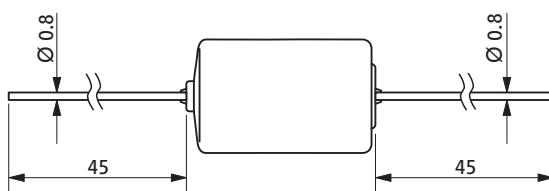


SL-550iX/PR

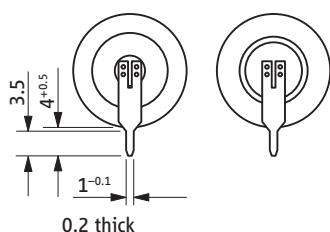


SL-550iX/PT

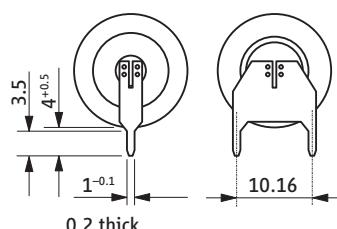


Typical Discharge Curves at +25 °C

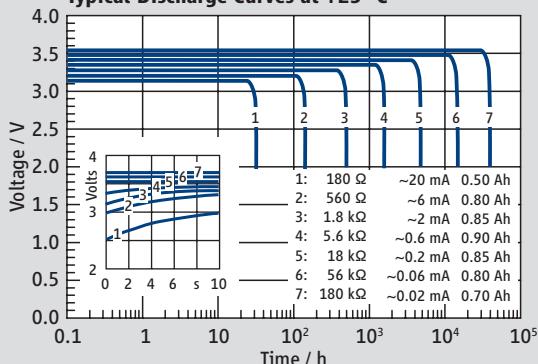

Available Capacity

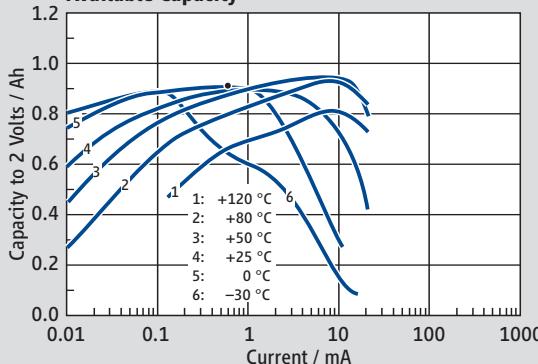

Operating Voltage

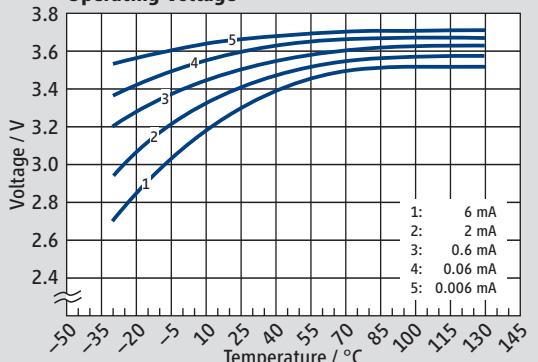

Available Terminations

	Catalogue no.
SL-550iX/S	Standard
SL-550iX/T	Tags
SL-550iX/P	Pins
SL-550iX/PR	Pins radial
SL-550iX/PT	Polarized tags



WARNING:
Fire, explosion, and severe burn hazard. Do not recharge, disassemble, heat above 150 °C, incinerate, or expose contents to water.

Any values given here are for informational purposes only. They also depend on actual conditions of use and are not warranties of future performance. Subject to change.