

Keyword:
Extended Temperature Range

Type: **SL-561**

Performance Data **Size 2/3AA**
(Typical values for batteries stored at 25°C for one year)


| | |
|-----------------------------------|----------------------|
| System | Li/SOCl ₂ |
| Nominal voltage | 3.6 V |
| Nominal capacity | 1.0 Ah |
| Nominal current | 1 mA |
| Max. continuous discharge current | 10 mA |
| Anode surface area | 9 cm ² |
| Lithium content | 0.5 g |
| Weight | 12 g |
| Volume | 5.7 cm ³ |
| Temperature range | -55...+130 °C |

WARNING:
Fire, explosion, and severe burn hazard. Do not recharge, disassemble, heat above 150 °C, incinerate, or expose contents to water.


UL recognition under file MH 12827

See also our website under Products/Safety


Typical Discharge Curves at +85°C

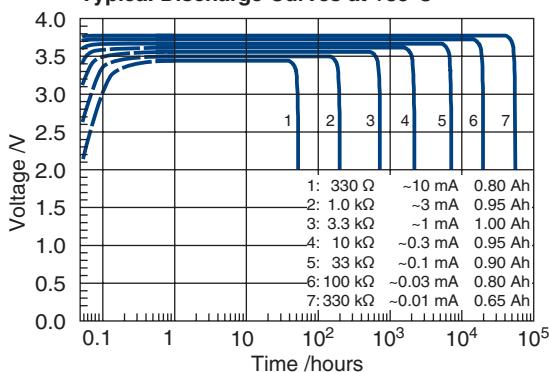


Available Capacity

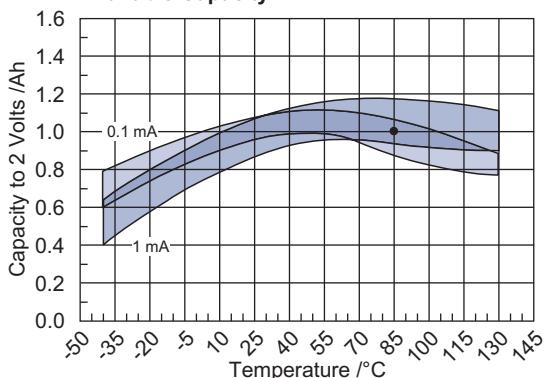


Operating Voltage

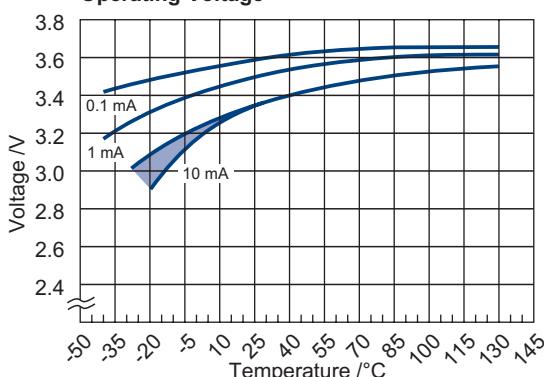


SL-561/S

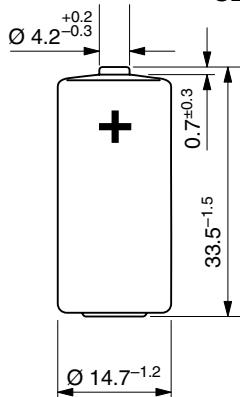


SL-561/T

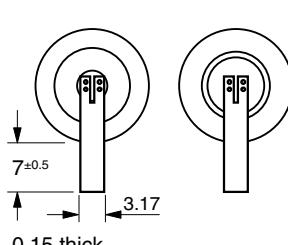


SL-561/P

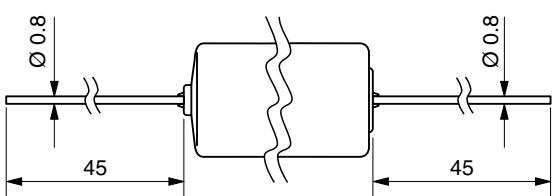

SL-561/PR

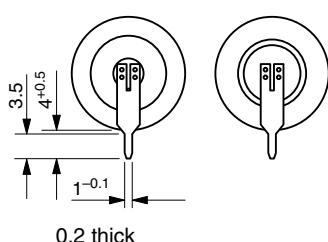

SL-561/PT

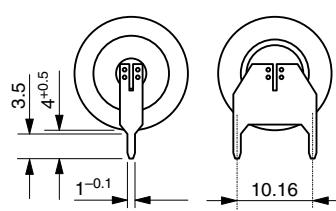

Available Terminations

| | |
|-----------|----------------|
| SL-561/S | Standard |
| SL-561/T | Tags |
| SL-561/P | Pins |
| SL-561/PR | Pins Radial |
| SL-561/PT | Polarized Tags |

Catalogue No.

| |
|---------------|
| 11 1 05611 00 |
| 11 1 05612 00 |
| 11 1 05613 00 |
| 11 1 05616 00 |
| 11 1 05618 00 |

Any values given here are for information purposes only. They also depend on actual conditions of use and are not warranties of future performance. Subject to change.